


2016 Arkansas Fire Weather Operating Plan



National Weather Service
Forecast Office
Little Rock, Arkansas



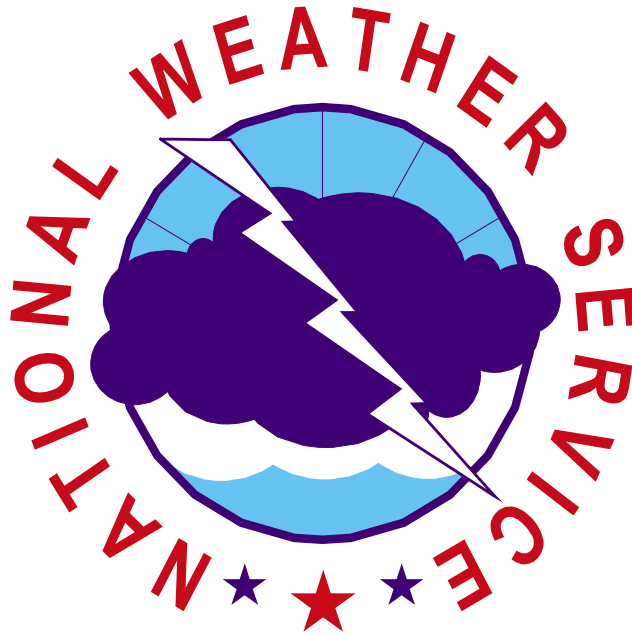

2016 Arkansas Fire Weather Operating Plan

National Weather Service
Forecast Office - Little Rock
8400 Remount Road
North Little Rock, AR 72118

Joseph C Goudsward
Senior Forecaster
Incident Meteorologist (IMET)



Table of Contents

Chapter	Page
1. Introduction	1
2. Important Changes	3
3. General Information	4
4. Role of the National Weather Service	5
5. Red Flag Program	7
6. Basic vs. Special Services	7
7. Forecast Products	11
8. NFDRS Forecasts	38
9. NWS Offices and Responsibility	44

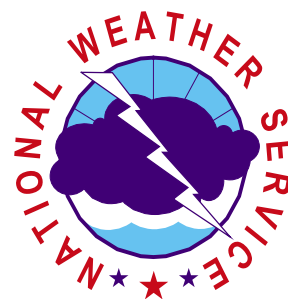


Table of Contents

Appendices	Page
#1 Wildland Fire Terminology	56
#2 Southern Region Contacts and IMETS	74
#3 Arkansas Fire Weather Zones	77
#4 National Fire Plan	78
#5 Fire Weather Links	84
#6 NFDRS Sites	84
#7 USFS, State, NPS, FWS Contacts	85
#8 Forecast products	93

Introduction

This document is the latest Arkansas Fire Weather Operating Plan. It serves to consolidate the fire weather services provided by National Weather Service (NWS) offices covering the state. The purpose of this operating plan can be broken down into three distinct areas. The first is to consolidate all the fire weather services provided by the five NWS offices covering the state of Arkansas as the fire weather zones for the state were split among five NWS offices. The second purpose is to describe services available to the land management agencies. The last purpose is to provide information and guidelines to the forecasting staff at the five NWS offices to ensure that consistent information is given to their customers. Customers of NWS fire weather products and services in Arkansas must understand that the products and policies contained within may differ slightly based on local policy and procedure. The entire document may not completely apply to them.

Due to the continuing changes in the NWS, this operating plan will be a constant “work in progress” and will be updated as necessary. In the event this is necessary, affected agencies will be notified and addenda to this plan will be issued. Important changes and clarifications of the fire weather services will be listed in the introductory section in the next update.

The primary author of this edition of the Arkansas Fire Weather Operating Plan is Joseph Goudsward, Senior Forecaster, fire weather program leader and Incident Meteorologist (IMET) at the National Weather Service office in Little Rock, Arkansas.

Input and information was received from other NWS fire program leaders who have fire weather responsibility in Arkansas. These people are


Marty Mayeaux - NWS Shreveport, LA

John Sirmon - NWS Memphis, TN

Craig Sullivan - NWS Tulsa, OK

Eric Carpenter - NWS Jackson, MS

Fire weather services for the state of Arkansas are carried out by five National Weather Services offices with individual counties mapped out below.

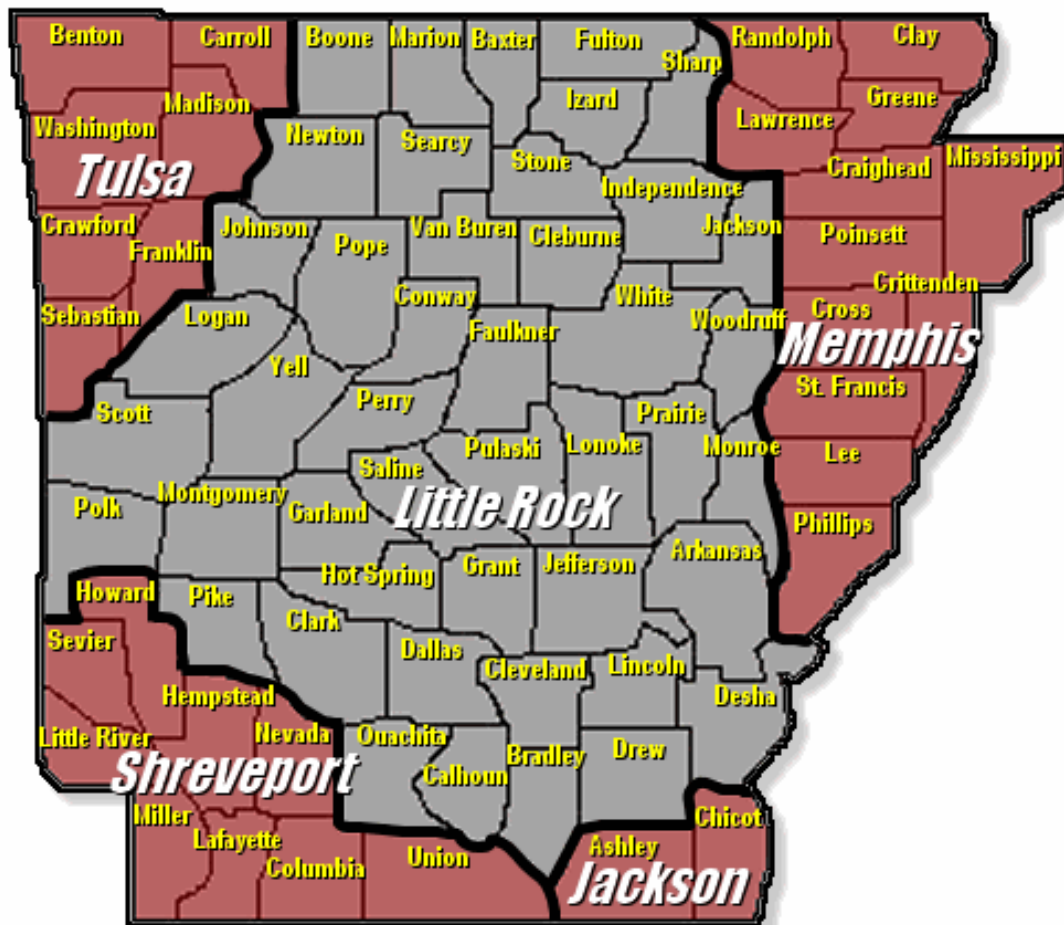

Significant Changes

The National Weather Service's spot weather forecast page is currently undergoing a significant update. The new spot weather forecast page will not be implemented or become operational at the time this document is updated. The new spot weather forecast page is expected to be operational sometime in the spring of 2016.

The spot weather section of this document will be updated to reflect the new spot weather request procedures. However, until the new spot weather forecast page is operational, please continue to submit spot weather forecast requests as before.

Additional training is available from the fire weather focal point at the National Weather Service office at Little Rock if requested.

General Information

What is a wildfire?

A wildfire is an unplanned or unwanted natural or human-caused fire, or a prescribed fire that threatens to escape its bounds. Each year more than 100,000 wildland fires occur in the United States.

What is a prescribed fire?

A prescribed fire is the planned use of carefully controlled fire for habitat enhancement. Prescribed burns are commonly used to prepare a site for planting, manage a fire hazard or reduce pest problems. The timing of the burn is determined by a number of conditions including weather, fuel moisture, soil moisture and relative humidity to ensure the fire is confined to the planned area.

How do wildfires start?

About 90% of wildfires are started by humans; the other 10% are started by lightning. Three components are necessary to start a fire: oxygen, fuel and heat. At least 16 percent oxygen must be in the air for a fire to start (our atmosphere contains 21%). Fuel is any living or dead material that will burn. Fuels such as dead plants, dry leaves, pine needles and grass will burn more readily than moist green plants because the dead material contains less moisture. Heat is usually supplied by a lightning strike to a tree or dry grass. People also can provide heat by carelessly starting a fire or leaving a fire unattended.

When is fire season?

The fire season in Arkansas is complex, and to a large extent dependent upon dormant fuels and drought. While the majority of wildfires occur from October to April, wildfires are possible at any time of the year. As such, the user-defined fire weather season in Arkansas is for the entire year. In reality, fire season extends from October 1st to April 30th for a total season of 212 days. These time frames correspond with the majority of the prescribed burning.

Why manage smoke*?

The state of Arkansas has in effect a Smoke Management Program (SMP). The purpose of the plan is to assure adherence to air quality regulations and to manage smoke from prescribed fires so that the smoke's impact on people and the environment will be acceptable. In 1997, the U.S. Environmental Protection Agency (EPA) reported that fine particles (2.5 micrometers or smaller in size) have the potential to significantly impair human health when people are exposed to high levels.

* Taken from Arkansas Forestry Commission Smoke Management Program Document

<http://forestry.arkansas.gov/Services/KidsTeachersEveryone/Documents/ArkansasVSMG.pdf>

The fine particles that can impair human health can also reduce visibility in federally mandated Class I areas such as Caney Creek Wilderness Area and Upper Buffalo Wilderness Area. In these areas, EPA has established a goal to make reasonable progress at removing any human-caused impairment to visibility.

An estimated 70 % of the particulate matter emissions in smoke are fine particles. Therefore, prescribed fire should be planned to: limit public safety hazards posed by smoke intrusion into populated areas; prevent deterioration of air quality; prevent National Ambient Air Quality Standards (NAAQS) violations; and limit visibility impairment at Class I areas or other smoke sensitive areas.

The SMP guides the prescribed fire manager to minimize the impact of particulate matter released into the atmosphere by estimating how many tons of fuel may be burned in an area. The amount of fuels that can be burned in an air shed (36 square miles) is based upon the ability of the atmosphere to disperse the particulate matter and the distance downwind to a smoke-sensitive area.

What is the role of the National Weather Service?

The objective of the National Weather Service Fire Weather Program is to provide meteorological support to wildland fire management agencies for the protection of life and property. This support includes warnings, forecasts, and on-site services during wildfires, and meteorological training for firefighters. The mission of operational excellence through superior future services, scientific advancements, and new technologies is being supported by the Boise Risk Reduction. The National Weather Service Forecast Office in Boise Idaho is located at the National Interagency Fire Center. This office is the focus of a risk reduction project which is still seeking to improve and modernize fire weather forecasting services in conjunction with NWS policy and procedure.

Weather is one of the most significant factors in determining the severity of wildland fires. The spread rate and intensity of fires are directly related to the wind speed, temperature and relative humidity. Climatic conditions such as long-term drought also play a major role in the number and intensity of wildfires. Accurate and timely weather information is vital to the planning and execution of strategies for suppressing wildfires. An accurate weather forecast can mean life or death to a firefighter and is also critical in protecting forest and range lands as well as the increasing number of homes in the wildland urban interface.

The National Weather Service Mission-

It is well known the primary mission of the NWS is to protect life and property from hazardous weather. This is normally accomplished through the issuance and dissemination of watches, warnings, advisories and forecasts with the general public being the primary beneficiary of the information. However, through an agreement between the NWS and wildland fire agencies, this primary mission has been expanded to support specific land management, fire protection and fire suppression activities.

The National Weather Service Fire Weather Objective-

Our objective is to provide fire weather products and services to the fire and land management community for the protection of life and property, promotion of firefighter safety, and stewardship of America's public wildlands.

The National Weather Service Mission and fire weather-

To accomplish the fire weather aspect of the NWS mission, each NWS office is staffed around the clock with meteorologists who are trained in fire weather. Each office provides a level of fire weather support determined by the local NWS office and fire agencies. In addition to general training, each office has designated a certain individual or several individuals with special skills, knowledge and training to serve as the Fire Weather Program Leaders (FWPL). These meteorologists are the main liaison between the NWS office and fire agencies. The FWPL will also coordinate the administrative activities and be the primary contact point in the office to maintain the successful working relationship with the fire weather customers. The routine fire weather support is provided by the general forecast staff with oversight by the FWPL.

The Fire Weather Program Leader is the customer's representative and the liaison between user agencies and the National Weather Service Meteorologist in Charge (MIC) at said office. The Fire Weather Program Leader will provide additional services at the request of the user agencies. These additional services may involve visits for familiarization of operations, training of observers, and instruction of various courses.

Certified Incident Meteorologists (IMETs) are strategically positioned at NWS offices across the country. Nationwide, the NWS employs nearly 80 experienced IMETs who can be dispatched to remote locations to support wildfire operations or other hazards. IMETs assist fire crew safety; provide tactical support to the fire management team and provide weather forecasts to the Fire Behavior Analyst (FBAN). These meteorologists are specifically trained to aid in wildfire suppression in the field. IMETs have undergone specialized training in localized, small scale forecasting, ICS, fire behavior, and fire operations that makes these fire weather forecasters key members of fire management teams.

Every year, IMETs are deployed to support hundreds of fires nationwide but are being used increasingly for all hazards support. NWS forecasters help on-scene fire management teams obtain and interpret weather information, train fire personnel on how weather may affect their operations during critical fire situations, and ensure the safety of firefighters. Requests for IMET deployment to a wildfire are coordinated by **the Southern Area Coordination Center (SACC) and** staff meteorologist (Larry Vanbussum) at the National Interagency Fire Center (NIFC) which is located in Boise, **Idaho and are ordered through the Arkansas-Oklahoma Interagency Coordination Center.** An IMET is assigned to the National Weather Service Forecast Office in Little Rock. **Additional details can be found in the Chapter 20 of the Southern Area Mob Guide** (http://gacc.nifc.gov/sacc/administrative/forms_references/SA_Mob_Guide/Chapter20.pdf) and the National Interagency Mob Guide (<http://www.nifc.gov/nicc/mobguide/CHAPTER20.pdf>).

Questions, comments, topics for discussion or queries regarding any aspect of fire weather or the fire weather program should be addressed to the appropriate NWS office, or that office's Meteorologist in Charge (MIC). Contact Information for the individual offices are listed in the section entitled "NWS Offices and Responsibility".

Red Flag Program

The intent of the **Red Flag** program is to provide land management agencies with appropriate notification of the likelihood those weather conditions associated with the outbreak of wildfire will occur. A **Red Flag** event is defined as a combination of critical fire weather patterns and critically dry fuels that could lead to the development of large wildland fires or cause containment problems for preexisting fires or prescribed burns. Forecasters will issue a **Fire Weather Watch** or **Red Flag Warning**, based on the criteria and timing explained below, under the product identifier RFW. The criteria may differ slightly between offices based on local criteria and user need.

Criteria-

The criteria for **Fire Weather Watches** and **Red Flag Warnings** have been established by the NWS in conjunction with various state and federal land agencies. For a red flag event in the Little Rock area of responsibility, all three of the following criteria must be met.

*Afternoon minimum relative humidity is expected to be 25% or lower.

*20-foot sustained winds of 14 mph or greater are expected. Stronger 10-meter high winds that are measured at airports are not used. We are concerned with the 20-foot high surface winds over the mean vegetation which may be as little as ½ of what airport winds are running

*10-hour fuels that are determined to be critically dry. This is determined via coordination with the USDA Forest Service **Arkansas-Oklahoma Interagency Coordination Center**. If contact cannot be established, then the fire weather forecaster should access the 10-hour dead fuel moisture map which is available off the Internet at www.fs.fed.us/land/wfas/fm_10.gif. Values less than 10 percent are considered critical for 10- hour fuels. Other parameters that also should be considered include the likelihood of lightning occurrence, wind shifts, and/or current wildfire activity.

Basic versus special services

It is crucial to point out the differences in basic services and special services as defined by the national interagency agreement.

Basic Services -

Basic services are meteorological services performed from the NWS office. Basic services are usually performed during normal hours of operations and are provided to user agencies at no cost. The Arkansas Forestry Commission, the USDA Forest Service, the National Park Service, and the U.S. Fish and Wildlife Service have land management responsibilities. The NWS is responsible for providing accurate and timely fire weather forecasts to effectively carry out their responsibilities for the protection of life and property.

Special Services -

- 1) Special services are meteorological services provided to user agencies that often have unique requirements for weather support. These services may best be performed by the Fire Weather Program Leader or IMET at a site other than the forecast office. Special services are usually initiated by the requesting agency, and costs such as travel and per diem will be reimbursable to the NWS.
- 2) Special meteorological services are those requiring a meteorologist to be away from the forecast office, and/or, in non-emergency situations, to be on overtime.
- 3) Special services include the All Hazards Meteorological Response System (AMRS), interim staffing at the home office of the IMET and other on-site meteorological services such as weather observer training, weather station visits, and training requested by other user agencies. User agencies such as the USDA or the National Park Service are responsible for paying overtime, travel, and per diem costs for special services. Costs to be recovered from the user are calculated on the basis of expense reports submitted by the forecast office to NWS Southern Region Headquarters. Billing of the user agencies is handled by the appropriate NWS administrative division based on the expense report. Bills include a statement of services rendered, as well as the dates and locations of services provided.

4) IMET Services-

IMETs use special equipment to prepare critical information for wildfire suppression. The All Hazards Meteorological Response System (AMRS) is a miniature mobile forecast station complete with communications equipment, laptop computer, printer and weather observation equipment. The system enables the IMET to provide close meteorological support to suppression efforts at fire command centers. Designed to be deployed rapidly, the AMRS is set up by the IMET near the fire command center to provide forecast information to help managers decide where to deploy firefighting resources. The AMRS will accompany the IMET to the fire when dispatched from his or her home office.

IMETs use laptop computers with built in Internet capability. The IMET also has specialized software where they can receive the latest information about surface and upper air observations, computer models, as well as Doppler weather radar and weather satellite data to make specialized forecasts.

IMETs also have the Air Transportable Meteorological Unit (ATMU) at their disposal. The ATMU unit contains a theodolite with a tripod and a calculator for calculating winds aloft, two belt weather kits, weather balloons, a nozzle and regulator for a helium tank, office supplies and miscellaneous expendables.

The IMET can also request one or several **IRAWS (Incident Remote Automatic Weather Stations)** which are self-contained portable weather stations with instruments for measuring temperature, dew point and wind. It is powered by a solar panel and

battery. It is 8.2 cubic feet and weighs 125 pounds. When an **IRAWS** is ordered up, it is accompanied by two trained technicians from the National Interagency Fire Center (NIFC) in Boise, Idaho who will oversee the installation, maintenance and removal of the system.

Requests for the IMET **based in Little Rock, AR** should be made through the **USDA Forest Service Arkansas-Oklahoma Interagency Coordination Center in Hot Springs, AR**. The Fire Weather Program Leader or Meteorologist-in-Charge at the appropriate NWS office should be made aware of the need for AMRS and IMET services in their County Warning and Forecast Area (CWFA). Typically, the IMET nearest the incident will be deployed. Note: Not all NWS offices have a certified IMET. USDA Forest Service Regions should have a list of available IMETs. During times of limited resources, IMETs from other areas of the country may be called.

The requesting agency is responsible for coordinating transportation of the IMET and all necessary equipment to and from the incident. The requesting agency is also responsible for any storage of the unit while in transit and shelter for the IMET and unit at the site. A sheltered work area, of at least 50 square feet with a table and chair, must be protected from excessive dust, be free of standing water or condensation, and must be heated and/or cooled sufficiently to allow efficient operation of all equipment. Power (120V AC) must be provided for the AMRS electrical equipment and priority telephone access during certain short periods each day must be made available.

The first notification of the mobilization of the fire weather meteorologist will normally be by phone from the National Weather Service Southern Region Fire Weather Program Leader. The following information should be obtained if available at that time

1. Location and name of fire or incident
2. Fire resource number
3. Travel arrangements

After notification, immediate steps should be taken to cover all the shifts that the fire weather meteorologist would otherwise be working in his home office. The laptop computer, portable printer and modem will be carried by the fire weather meteorologist to and from the fire or incident.

Fire Weather Training -

National Weather Service fire weather meteorologists are available to assist fire control agencies with training at fire behavior school and other related courses. Requests for assistance should be forwarded to the Meteorologist-in-Charge (MIC) at the respective NWS office(s) by written letter. The requesting agency may be responsible for any cost incurred such as lodging and per diem if necessary.

Communications-

Any weather forecast product produced by the NWS is transmitted through the Advanced Weather Interactive Processing System (AWIPS). The products are then routed in the

U.S. Forest Service's Weather Information Management System or WIMS. The NWS carries the responsibility of ensuring successful transmission of fire weather products through AWIPS and its communications subsystems; it maintains no control over the operation of WIMS. All products are available on the Internet. However, the Internet is not sanctioned by the NWS for the operational distribution of forecast products.

User agencies should establish a local agreement with the program leader from each NWS office on a reliable means of dissemination. While fire weather watches, red flag warnings, red flag alerts and spot weather forecasts are posted to NWS office websites, their primary means of dissemination to wildland fire agencies may be through a facsimile, electronic mail or another method agreed upon between the agencies served and the appropriate NWS office.

NWS offices should always coordinate with the Arkansas Forestry Commission, the USDA Forest Service and other appropriate land management agencies if a red flag event is possible.

Forecast Products

Arkansas fire weather forecast products are produced by five individual NWS offices. Even though all offices follow a standardized format with certain required elements, the actual forecast products issued by each individual NWS office will differ slightly from the formats discussed in this section due to local forecast adaptation. Local forecast adaptation may include several weather and forecast parameters not listed below. The following format is for fire weather forecast products produced at the office in Little Rock, AR.

Routine Fire Weather Forecasts (FWF)-

Daily routine fire weather forecasts are available to anyone with an interest in land management and pre-suppression activities in Arkansas. These forecasts are issued twice a day by the NWS office with fire weather responsibilities for its particular part of Arkansas. Forecasts that are issued in the morning will include a detailed forecast of all required and localized parameters for three 12-hour forecast periods. The afternoon issuance of said forecast will include a detailed forecast of all required and localized parameters for four 12-hour forecast periods. All products will also include a three to seven day extended forecast of cloud cover, temperatures, winds and precipitation. The forecast for any specific day is broken down to the county level. The number and grouping of counties will likely vary with each forecast issuance depending on the expected weather conditions.

Routine fire weather forecasts must include (1) a forecast discussion; (2) predictions of cloud amount and precipitation, temperature and temperature trend, humidity and humidity trend and wind; (3) any optional forecast parameters and (4) an extended forecast. Individual NWS offices have different parameters based on the feedback received from their customers.

Current red flag status-

Identification of red flag events is a primary responsibility of the forecaster producing the fire weather forecast. The purpose of Fire Weather Watches and Red Flag Warnings is to provide land management agencies with appropriate notification of the likelihood those weather conditions associated with the outbreak of a wildfire may occur.

A headline is required when Red Flag Warnings and/or Fire Weather Watches are in effect. The headline will include the warning type, location and effective time period. The location will be described in terms of geographic or other easily identified markers, such as forests, parks, cities, towns, rivers, or highways. Also, the headline is required for a Red Flag Warning and/or Fire Weather Watch in each appropriate zone grouping. Headlines will also be used for significant trends of locally-defined critical weather elements for non-watch or non-warning periods. These may include widespread thunderstorm activity, strong gusty winds or an expected wind shift. Particular attention should be paid to headlines when firefighting personnel are working in the field either on a wildfire or prescribed burn. The headline will alert the dispatcher who will then notify the appropriate crews.

The following sections describe both the required and optional forecast parameters that are provided in the fire weather forecast products issued by NWS offices in Arkansas. Which optional parameters are used will be determined by the individual NWS offices as they tailor their services to fit the needs of the user agencies. NWS offices are obligated to provide user agencies with units of measure and/or a legend to explain ambiguous weather parameters. All forecast elements are not site specific but rather averaged over the entire forecast area in any specific time frame.

Required Forecast Parameters-

Forecast Discussion-

The forecast discussion should be brief but concise and describe the main weather features adequately in order to explain the forecasted conditions. Typically the forecast discussion will cover the entire forecast period with the main emphasis on the first two days. The discussion should also cover the extended period but may be more general than the discussion for the first two days. Information on weather changes such as fronts, outflow boundaries and timing of precipitation and thunderstorms are among the most critical services that the NWS can provide. These elements all can be described qualitatively in this section. Forecasters are strongly encouraged to highlight any weather changes which could pose a threat to land management or fire control efforts in the headline statement preceding the narrative discussion. Synoptic discussions should focus mainly on changes in weather conditions that would impact land management activities and planning.

Cloud amount-

Sky condition trends may be discussed qualitatively in the synopsis to give the user agencies a better understanding of how other weather variables will be impacted. The predominant sky condition or trend will be forecast for the fire weather forecast zone.

Chances of precipitation-

The chance of precipitation, also referred to as probability of precipitation or POP, is the likelihood of occurrence, expressed as a percentage, that measurable precipitation (0.01 inch or more) will occur at any point within a specified forecast area over a specific period of time (typically 12 hours). Generally, a 20% chance of precipitation means that there is a 20 in 100 (or 1 in 5) chance of precipitation occurring. Anything less than a 50% chance of precipitation is generally a forecast of no precipitation, while anything more than a 50% chance is a forecast for precipitation. However, the value of the POP has no direct relationship to the amount of rain that may occur, despite the assumption that a higher POP implies greater precipitation amounts. The POP value is actually derived from the likelihood that precipitation will occur anywhere within the specified forecast area and the percentage of the area that is expected to receive precipitation in the event it does occur. The NWS will often qualify the chance of precipitation with expressions of uncertainty or use areal coverage qualifiers for convective events.

POPs and Equivalent NWS Forecast Wording

POPs	Qualifying Terms	Areal Term (Convective)
10 percent	Slight Chance or None	Isolated or none
20 percent	Slight Chance	Isolated
30 to 50 percent	Chance	Scattered
60 to 70 percent	Likely	Numerous
80 percent or more	None	None

Precipitation type-

A forecast of the precipitation type will accompany a probability of precipitation forecast. The most hazardous type of precipitation for a particular fire weather zone will be forecast if one or more types of precipitation are possible. For example, if thunderstorms are possible, no matter how predominant when compared with other types of precipitation, they will be listed as the main type of precipitation due to the obvious impacts on fire weather. The same holds true in winter when both freezing rain and snow are forecast, freezing rain will be listed as the predominant precipitation type as it is *considered more hazardous*.

Temperatures/Temperature Trends-

Temperatures are given in degrees Fahrenheit. Temperatures have a direct impact on other weather parameters and should always be included in routine and spot forecasts. The maximum temperature will be forecast for the day period and the minimum temperature will be forecast at night. Forecasters may give one value that would be halfway between the expected range across a particular fire weather zone and a range of temperatures. Temperatures may vary greatly over a small area, especially in complex terrain and open areas compared to areas under a closed canopy of trees. Afternoon high temperatures likely will exceed the forecast maximum in valley locations while temperatures at higher elevations are usually cooler. A 24 hour temperature trend will also be included.

From the Prescribed Fire Implementation Guide for the Ouachita and Ozark-St. Francis National Forests: *Forests will develop maximum temperature levels for a cut-off level to prevent resource damage and allow for accomplishing the objectives of the burn. Threshold temperatures are, generally, 95 degrees Fahrenheit for all dormant season burning and for site prep and stand replacement burning conducted throughout the year. Growing season, line prep, ridge top, plantation prep (all firing situations using only backing firing techniques) have no*

established limits on forecast daily maximum air temperatures. In those circumstances where deviation is needed from the stated limitations, implementation may be approved at the local level by the District Ranger who has GO/NOGO authority. Mitigations for burning when forecast air temperature exceeds the threshold level will be recorded in the project implementation file(s).

Relative Humidity/Relative Humidity Trends-

Relative humidity is the ratio (expressed in percentage) of the amount of water vapor in the air compared to the amount the air is capable of holding at its temperature and pressure. Since relative humidity values are also critical to fire management activities, they should always be included in routine and spot forecasts. The minimum or lowest humidity will be forecast for the day period and the highest humidity at night. Relative humidity values can vary greatly over a small area due to variations in topography, vegetation and location with respect to bodies of water, amongst others.

One value, midway between the ranges expected across the fire weather zone, will be forecast, or a range of relative humidity will be given. Lower humidity than forecast will be typically observed in valleys during the afternoons, particularly on a sunny day.

From the Prescribed Fire Implementation Guide for the Ouachita and Ozark-St.

Francis National Forests: *No bums shall be ignited when the on-site RH is less than 25% or when the RH is predicted to be less than 25% during the planned bum period unless approved at the Regional level. Humidity values from 25% through 29% require approval from the Forest Supervisor. When NWS forecast relative humidity is below 25%, the requesting unit will submit a Regional-level variance request for burn approval. On receiving a forecast minimum relative humidity of 25 through 29%, the requesting unit will submit a Forest-level variance request for approval of the burn. In each case, a BEHAVE run that defines expected fire behavior (and) a burning map that displays land ownership, fuel types and fuels conditions bordering the unit will be submitted as part of the variance request package.*

20-foot wind direction and speed-

Winds at 20-feet above the ground or above the average height of vegetation are the most common winds used in the routine fire weather forecast. Forecasts will reflect the 10-minute average that is commonly measured at observation sites. Since most surface stations used for NWS forecasts measure the 2-minute wind at 33 feet, a reduction factor is needed to arrive at the 20-foot wind. The standard reduction is 30 percent but a different conversion factor may be used if conditions warrant, especially when forecasting for a localized area like in a spot forecast. The wind direction will be forecast to eight compass points and wind speed will be expressed in miles per hour. Again, one value midway between the range expected across the fire weather zone or a range will be forecast. The following table may be used as a guide in converting the zone forecast winds to the 20-foot winds.

From the Prescribed Fire Implementation Guide for the Ouachita and Ozark-St. Francis National Forests: *Actual wind speed or forecast by NWS (20 foot wind speed) shall not exceed 20 mph. Wind gusts are to be considered part of the overall wind speed. Wind speeds above 20 mph require Regional level approval. Requests for prescribed burning when forecast wind speed is to exceed 20 mph will be processed on a Regional-level variance request form accompanied by a BEHAVE run that defines expected fire behavior by fuel type (and) a burning map of the unit that displays land ownership bordering the burn unit's perimeter. Use appropriate and reliable equipment to collect on-site weather observations.*

20 Foot Wind Speed Conversion

Standard Wind Speed	20-Foot Wind Speed
Around 5 mph	3 mph or light and variable
5 to 10 mph	6 mph
Around 10 mph	7 mph
10 to 15 mph	11 mph
Around 15 mph	12 mph
10 to 20 mph	13 mph
15 to 25 mph	14 mph
20 to 30 mph	18 mph

Extended forecast-

An extended forecast is critical to fire weather managers for planning purposes. Many prescribed burns are planned days in advance and often are dependent upon the extended portion of the fire weather forecast. Weather elements in the outlook period will include all of the mandatory day 1 and day 2 forecast elements. A wind forecast is required through 5 days and will reflect the most significant synoptically driven wind affecting fire operations or ignition. Critical humidity conditions to 5 days if established by local customers will be included.

Optional Forecast Parameters

Precipitation amount-

A forecast of the expected precipitation amount that will fall in inches may be included. Rainfall amounts are very variable, especially in convective events, and in areas of complex terrain. With that in mind, the rainfall amount forecast will be a single number that will be an average across the forecast area.

Precipitation duration-

A forecast of how long the precipitation will fall over the fire weather zone during the 12 hour forecast period may be included. Rainfall duration is very variable, especially in convective events, and in areas of complex terrain. The time the precipitation is expected to fall may occur early in the forecast period, late in the forecast period or at intermittent times during the forecast cycle. Some offices put the precipitation beginning and ending times in their forecast, otherwise it may be gleaned from other information.

1700 foot above ground level mixing height temperature-

The 1700 feet above ground level mixing height temperature in degrees Fahrenheit may be forecast. This is the surface temperature that must be reached in order for the mixing depth to increase to 1700 feet above ground level, the minimum criteria established by the Clean Air Act. Once the forecast temperature at the burn site reaches this number, it can be assumed that the mixing height above the burn site is at least 500 meters or 1700 feet above ground level.

Mixing height-

The mixing height is the projected height in feet above ground level or mean sea level through vigorous mixing will take place based on the maximum temperature on a given day. It is the height at which smoke will lose its buoyancy and stop rising. The forecast of mixing height is critical for smoke dispersion efforts. Prescribed burning is a frequent activity of land managers and cannot be performed if mixing heights are not adequate for proper smoke dispersion. The objectives of prescribed burning include the elimination of dead fuels to reduce the threat of extreme fire behavior, creation of a wildlife habitat or recreation area, trail management or the eradication of certain diseases.

The Clean Air Act states that land managers must adhere to strict guidelines of smoke dispersion with a minimum mixing height depth of 1700 feet. Mixing heights are one of the most widely-used parameters of the fire weather forecast and are crucial to planning prescribed burns and is a critical tool for wildfire suppression. The mixing height is expressed in feet (mean sea level) or possibly AGL (above ground level). Once again, the mixing height is the top of the layer through which relatively vigorous mixing will take place. It is the height at which smoke will lose its buoyancy and stop rising. A well-mixed layer is a layer in the atmosphere in which temperature drops roughly 5.5 degrees per 1000 feet of elevation. Mixing heights commonly go through large daily and seasonal variations.

USDA Forest Service Region 8 uses a weighted average for smoked dispersion based on the transport wind by using the following table. In some instances, mixing heights must be 2700 feet above ground level with low transport winds.

**Minimum combinations for transport winds speeds and mixing heights
(above ground level).**

<u>Transport Wind Speed</u>		<u>Mixing Height Minimum</u>		<u>Minimums Rounded to Nearest</u>	
Meters per second	Miles per hour	Meters	Feet	Miles per hour	Feet
3.0	6.7	890	2920	7	2700
3.1	6.9	850	2789		
3.2	7.2	800	2625		
3.3	7.4	770	2526		
3.4	7.6	740	2428	8	2300
3.5	7.8	720	2362		
3.6	8.1	690	2264		
3.7	8.3	660	2165		
3.8	8.5	640	2100	9	1900
3.9	8.7	620	2034		
4.0	8.9	600	1968		

Table is taken from the document USDA Forest Service Region 8 Smoke Management Guidelines.

The USFS will not burn when the minimum combination of mixing heights (above ground level) and transport wind speeds are below the values shown in Table 1, unless atmospheric dispersion modeling results clearly demonstrate no smoke sensitive targets are likely to be adversely impacted.

Category day-

Category day is derived by multiplying the forecast mixing heights by the transport winds. The resulting number tells the land management agencies whether smoke dispersion will meet the new federal guidelines and consequently if a planned prescribed burn can be ignited.

Category Day

TWS* (mph)	Mixing Height												
	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000	7500
7			1	1	1	2	2	3	3	3	3	3	3
8		1	1	2	2	3	3	3	3	3	3	3	4
9	1	1	1	2	3	3	3	3	3	3	3	4	4
10	1	1	1	3	3	3	3	3	3	4	4	4	4
11	1	1	2	3	3	3	3	3	4	4	4	4	4
12	1	1	3	3	3	3	3	4	4	4	4	4	4
13	1	2	3	3	3	3	3	4	4	4	4	4	4
14	1	2	3	3	3	3	4	4	4	4	4	4	4
15	2	3	3	3	3	4	4	4	4	4	4	4	4
16	2	3	3	3	3	4	4	4	4	4	4	4	5
17	2	3	3	3	4	4	4	4	4	4	4	5	5
18	2	3	3	3	4	4	4	4	4	4	4	5	5
19	2	3	3	3	4	4	4	4	4	4	5	5	5
20	3	3	3	4	4	4	4	4	4	5	5	5	5

*TWS is transport wind speed and is discussed below.

Once the category day is calculated, the derived number is compared to the respective guidelines:

Category Day	Guidelines
1	Burning between 11:00 a.m. and 4:00 p.m. maximum of 100 acres and not before surface inversion has lifted . No burning in slash, piled debris, or heavy fuel loads .
2	No burning until 11:00 a.m. and not before inversion has lifted. Burn should be substantially over by 4:00 p.m.
3	Burn only after surface inversion has lifted.
4	Burn anytime.
5	“Unstable” and windy. Excellent smoke dispersal. Burn with caution.

Transport winds-

Transport winds are defined as the average wind speed and direction for all the winds from the surface through the mixing height in knots. Knowledge of transport winds is crucial in the effective management of smoke dispersion. Transport winds provide land managers with information about the horizontal dispersion (location and distance downwind from the source) of suspended particulates from fires.

SMOKE IMPACT SITUATIONS TO BE AWARE OF*

When forecasted transport wind speeds (i.e., the average wind speed throughout the mixing layer) are high (e.g., 12 - 15 mph and higher), then the risk of heavy smoke impacts farther downwind (30 miles or more) increases significantly. As the smoke begins to lift upward in the mixing layer, the higher wind speeds can push the plume over, causing it to remain close to the ground. The smoke is unable to dilute and disperse. As the higher winds carry the smoke plume, the potential for smoke impacts becomes greater much farther downwind than may be anticipated

- As evening hours approach, the mixing layer begins to lower. Residual smoke still within the mixing layer will become more concentrated as the layer compresses. This increase in concentrations can result in higher concentrations over populated areas, resulting in health impacts and a greater potential for an exceedance of the NAAQS. This can be 20 to 30 miles downwind.

- When the mixing height is 2000' - 2500' and the transport winds are over 15 mph, heavy smoke concentrations have been observed at ground level as much as 40 miles away.
- Even in situations where smoke is dispersing well, if the plume is tracking 20 miles or more downwind, any smoke entering a sensitive area in the early evening will be subject to the lowering mixing layer resulting in higher ground level concentrations.

* Taken from the document USDA Forest Service Region 8 Smoke Management Guidelines

Haines Index-

Also referred to as LASI, the Haines Index (developed in 1988 by Donald Haines, a research meteorologist with the Forest Service), is used to indicate the potential (whether a fire is occurring or not) for wildfire growth by measuring the stability and dryness of the air. The Haines Index is calculated by combining the stability and moisture content of the atmosphere into a number that correlates well with large fire growth. This index has been shown to correlate with large fire growth on initiating and existing fires where surface winds do not dominate fire behavior. Because of differing terrain, Haines developed different criteria for low elevation, mid elevation, and high elevation locations. The Low Level Haines Index is used exclusively in the state of Arkansas.

The stability term is determined by the temperature difference between two atmospheric levels while the moisture term is determined by the difference between temperature and dew point at one specific level. Measurements are made at specific pressure (millibar) levels in the atmosphere. These pressure levels are roughly at 1500 and 5000 feet above ground level. All measurements are in degrees Celsius.

Low Level Haines Index = Stability Term (Temp 950 - Temp 850) + Moisture Term (Temp 850 - Dew Point 850) where 950 and 850 are the 950 (roughly 1500 ft) and 850 (roughly 5000 ft) millibar level. Each term is assigned a value between one and three based on the following criteria and added together. The Haines Index ranges from two to six depending upon the severity of the weather.

Measured Atmospheric Terms

Assigned Value	Stability Term	Moisture Term
1	3 degrees C or less	5 degrees C or less
2	4 to 7 degrees C	6 to 9 degrees C
3	8 degrees C or more	10 degrees C or more

Once the stability term and moisture term are derived, the values are added together to produce the Haines Index. The Haines index corresponds to Fire Growth Potential by using the following chart.

Low Level Haines Index

Haines Index	Fire Growth Potential
2 & 3	Very Low Fire Growth Potential
4	Low Fire Growth Potential
5	Moderate Fire Growth Potential
6	High Fire Growth Potential

Although this is just one factor in judging the potential for fire growth, a five or six can serve as an alert that wildfires or prescribed burns may get out of control. There are some precautions that must be taken into account when using the Haines Index. The Haines Index does not take wind into account at all. It is possible to have a low Haines Index value while the wind is creating a very dangerous fire situation. The Haines Index also does not take into account fuel moisture. It only measures moisture at a pre-determined level in the free atmosphere. Moisture at this altitude may not be representative of the relative humidity conditions at the surface where the fuels are and finally the Haines Index does not account for terrain, fuel continuity, ignition risk or slope.

Stability Class-

The forecast of stability class is an attempt to qualify the degree to which vertical motion of the atmosphere is enhanced. Stability classes are dependent upon the amount of incoming solar radiation along with forecasts of wind speed and cloud cover. Atmospheric stability offers some clue as to how readily a pollutant will be dispersed. The more unstable the stability class, the more readily a pollutant is dispersed.

However, an extremely unstable atmosphere could lead to additional downwind concerns and likely convective development. A stability class of B or C is preferred for efficient smoke dispersion.

Stability Class

Stability Class	Stability Class Description
A	Extremely Unstable
B	Unstable
C	Slightly Unstable
D	Neutral
E	Slightly Stable
F	Stable

Stagnation Index-

The stagnation index is a number from zero to three computed from forecast variables that are produced from a complex numerical model used by the NWS. The model takes into account the relative humidity in the low levels, the model prediction of precipitation, vertical motion and wind speed. The index is used by fire managers, who are cognizant of the need to occasionally restrict open burning in order to reduce atmospheric contaminants. A higher index correlates to greater stagnation.

Stagnation Index - Daytime Scale

Stagnation Index	Effect on Burning Operations
0	Permitted from sunrise to sunset.
1	Permitted 1 hour after sunrise until sunset.
2	Permitted 2 hours after sunrise until sunset.
3	Permitted 2 hours after sunrise until 1 hour before sunset.

Stagnation Index - Nighttime Scale

Stagnation Index	Effect on Burning Operations
0	Permitted from sunset to sunrise.
1	Permitted until 2 hours before sunset.
2	Permitted until 4 hours after sunset.
3	No burning permitted.

0 Equates to winds of greater than 10 mph

1 Equates to winds 10 mph or less with rain

2 Dry with decent winds

3 Dry with light winds and stagnant conditions

Ventilation Index-

The ventilation index is also a product of the mixing height and the transport wind speeds. It is a measure of the volume rate of horizontal transport of air within the mixing layer per unit distance normal to the winds. Units are in knot-feet. As a guide, the following categories have been established to describe the ventilation.

Ventilation Index

Ventilation Index	Effect on ventilation
150,000 kt-ft or greater	Excellent ventilation
100,000 - 149,000 kt-ft	Very good ventilation
60,000 - 99,999 kt-ft	Good ventilation
40,000 - 59,999 kt-ft	Fair Ventilation
Less than 40,000 kt-ft	Poor Ventilation

When ventilation values are less than 40,000 kt-ft along with transport winds of less than 7.0 knots, dispersion of any pollutants released into the atmosphere will be severely limited.

Dispersion Index-

The Atmospheric Dispersion Index (ADI) is a numerical rating of the atmosphere's capability to transport pollutants away from their sources. The model uses a 50km rectangular control volume with the pollutant source at the rear edge and also assumes that the pollutant changes linearly downwind from the emission source.

The Dispersion index incorporates the following elements into its calculation

Ceiling – height at which clouds cover at least 50% of the sky, weighted for coverage.

Mixing height - height at which smoke will lose its buoyancy and stop rising.

Transport wind - average wind speed & direction for wind through the mixing height.

Surface wind - average winds speed & direction for the day.


Dispersion Index

Dispersion Index	Description
0 – 20	Poor dispersion, stagnant air if conditions persist
21 – 40	Poor to fair dispersion,
41 – 60	Generally good dispersion
61 – 80	Very good dispersion, control problems likely
80 +	Excellent dispersion, control problems expected

LVORI Index-

Lvori (low visibility occurrence risk index) is a nighttime dispersion forecast that is a function of both relative humidity and the dispersion index. LVORI is based on the proportion of accidents involving fog and or smoke as reported by the Florida Highway Patrol over a two year span.

Out of 400,000 accidents reported in that time frame, fog and or smoke was present for 3000 of them leading to a statistical analysis on which the index is based. The scale goes from one to ten with one meaning there is little chance of low visibility while 10 indicates low visibility is likely.

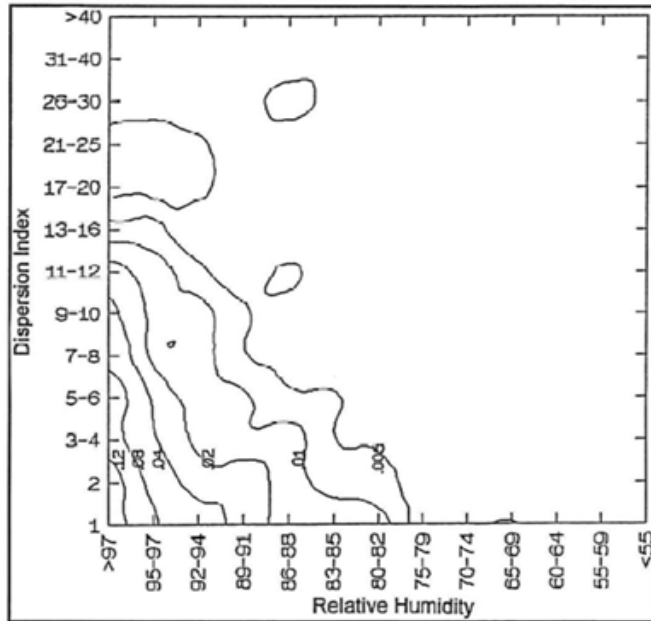

Using the chart on the left, it is easy to see the majority of the accidents occurred when relative humidity was high and dispersion index was low. The number of accidents decreased as dispersion index and relative humidity decreased.

As stated earlier, the LVORI index goes from one to ten. The following table summarizes and gives an interpretation of the statistical analysis of the accident information. The lower the LVORI index, the lower the chances of reduced visibility exist. The higher the LVORI index is, the more likelihood that low visibility will exist.

Category	Interpretation
1	Lowest proportion of accidents with smoke and/or fog reported
2	Statistical reasons for not placing it in Cat 1 - accidents not much higher
3	30% - 50% higher proportion of accidents than Category 1
4	Accidents 2 times higher than Category 1
5	Accidents 3 to 10 times higher than Category 1
6	Accidents 10 to 20 times higher than Category 1
7	Accidents 20 to 40 times higher than Category 1
8	Accidents 40 to 75 times higher than Category 1
9	Accidents 75 to 125 times higher than Category 1
10	

Be cautious when the LVORI forecast is 8 through 10 and smoke is expected to persist through the night, areas of reduced visibility are likely. Be particularly cautious when a road is within three miles of the burn site with open fields, logging roads or open streams than can provide an easy transport of smoke. LVORI of six or seven should be treated with caution if there is smoke and a road is near.

Fire Weather Watch (RFW)-

A fire weather watch is issued to alert fire and land management agencies to the possibility of red flag conditions beyond the first forecast period (12 hours). The watch is

issued generally 12 to 48 hours in advance of the expected conditions, but can be issued up to 72 hours in advance if the forecaster is reasonably confident. The term FIRE WEATHER WATCH will be headlined in the routine fire weather forecast and before each forecast group the watch is in effect for. It will also be issued as a special forecast product. The watch will remain in effect until it expires, is canceled, or upgraded to a red flag warning. A fire weather watch will not usually be issued in the first period unless there is a threat of dry lightning or scattered thunderstorms during extreme drought. If the fire weather watch is canceled before its expiration time, a new RFW will be issued to notify users that the fire weather watch is no longer in effect.

Red Flag Warning (RFW)-

A red flag warning is used to alert fire and land management agencies that red flag conditions exist or are imminent. A red flag warning will be issued immediately when there is high confidence that red flag criteria will occur within the next 24 hours, or if those criteria are already being met. Due to forecast uncertainty beyond 12 hours, a fire weather watch will be more often used in the 12 to 24-hour time frame than a red flag warning.

When a warning is issued, the term RED FLAG WARNING will be headlined in the routine fire weather forecast and before each forecast group the warning is in effect for. It will also be issued as a special forecast product to inform users of the warning. The warning will be continued on subsequent forecasts until no longer valid. If the red flag warning is canceled before its expiration time, a new RFW will be issued to notify users that the red flag warning is no longer in effect.

Contents of Fire Weather Watch/Red Flag Warning:

1. A headline containing a brief description of the areal coverage and the time that the watch or warning will be in effect for.
2. The specific fire weather zone numbers included in the watch or warning area.
3. A brief discussion of the event.
4. An advisory sentence to alert the appropriate officials out in the field.

Update policy -

An agreement is in effect with the AOICC (Arkansas Oklahoma Interagency Coordination Center), located in Hot Springs Arkansas, concerning updates and significant changes in sensible weather. If a red flag watch or fire weather warning is issued or is cancelled early, the forecaster will call the AOICC dispatcher at 501-321-5232 **during normal business hours or on the AOICC on-call cell phone (501-574-8758) after hours** to inform them. This agreement includes anytime a **Red Flag Warning or Fire Weather Watch** is issued including those issued with a normally scheduled Fire Weather Forecast.

People may be burning any time and sudden drastic weather changes may affect fire behavior and more important, pose a hazard to the people in the field. Forecasters are encouraged to keep an eye on conditions at wildfire or prescribed burn sites where a spot weather forecast was requested. If gusty winds, a sudden wind shift or thunderstorms are near the vicinity of crews in the field, please contact the AOICC so they can advise crews in the field. Conversely, often times the National Weather Service may not be aware of personnel in the field, it would then be the responsibility of the responsible agency to contact the NWS if conditions are becoming adverse to crew safety.

Spot Forecasts-

Spot forecasts are site-specific forecasts for wildfires, prescribed burns, search and rescue operations, aerial spraying, etc. By being site-specific, these forecasts take into account the effects of topography, vegetation and any nearby bodies of water. Spot forecasts contain detailed forecast information including sky condition, precipitation and thunderstorm probability, specific temperatures and humidity, and wind speed and direction for the specific area. Spot forecast formats are now standardized to provide the best possible services to the user agencies.

The Interagency Agreement for Meteorological Services (NWS directive 10-406) states that spot forecasts for wildland fires or any other special federal projects (i.e. spraying, seeding, fuels management, or search and rescue operations) shall be made available without cost to Interagency Wildland Fire Agencies. These agencies include the Bureau of Land Management, Bureau of Indian Affairs, U.S. Fish and Wildlife Service, National Park Service of the U.S. Dept. of Interior; and the Forest Service of the U.S. Dept. of Agriculture. The agreement includes any state, local or tribal fire agency working in coordination with a federal participant in the Interagency Agreement for Meteorological Services.

The NWS will not provide routine forecast support to state and local fire management agencies working outside the Interagency Agreement for Meteorological Services. However, forecast support will always be provided to any requesting agency in support of wildfire activities or any other situation which involves the protection of life and property or is essential to public safety, e.g. due to the proximity of population centers or critical infrastructure.

Spot forecasts are available upon request at any time of day, week, year or season. Consultation service is also available for planning projects for which weather might be a factor. Requests for spot forecasts will be serviced by at least one trained meteorologist. These requests will be completed as soon as possible and should typically take around 30 minutes or less. However, protection agencies should be aware that other duties (such as severe weather) may take higher priority, and short delays may occur. If excessive delays are encountered, please notify the appropriate NWS office. If the spot forecast is to support a wildfire, please inform the forecaster, or annotate the spot request form accordingly.

Requesting a Spot Forecast-

To request a spot forecast, go to the home page of the appropriate National Weather Service office. Open up the fire weather page and click on the button or link labeled "Click for spot forecast" or something similar. You will then be taken to the Spot Request Form.

The National Weather Service will be implementing a new procedure to request and obtain a spot weather forecast this year. While the exact date of when this new procedure will be enacted is uncertain, it will be before the end of the 2016 calendar year.

To view a presentation (in PDF) about the new spot weather forecast procedure, click on the following link:

<http://www.srh.noaa.gov/images/lzk/pdf/spotfcst.pdf>

Please continue to use the current method to request and obtain a spot weather forecast until the new procedure is implemented. Timely notification will be given before the change occurs.

Spot Request Form-

Fill in this form with the information needed to request a spot forecast. The elements highlighted in red are required for us to complete your spot forecast. While the other items may not be necessary, they are very important for our ability to make an accurate and useful forecast. The more information you can provide the forecaster, the more accurate the spot forecast will be. There are several sections on the spot request form.

Project Name Section-

Provide the name for your project or the wildfire. The name cannot be the same as any other project or wildfire for the same day. You should use the radio buttons to indicate whether the spot forecast request is for a wildfire, a prescribed burn, **a wildland fire use fire (WFU) this incident type is no longer used ****, a Hazmat incident or a search and rescue mission (prescribed burn is the default when you enter the form). For prescribed fires, you need to indicate the ignition time and date using the 24-hour clock.

Requesting Agency Section-

Here you provide your agency name, the name of the requesting official, your phone number for both voice and fax (please include the area code) and your name. All this information will be helpful to us if there are problems or questions and we need to contact you.

Reason for Spot Forecast Request Section-

In this separate section, you must state the reason for the forecast request by choosing either wildfire or one of the **non-wildfire** reasons.

Location Section-

In this section you will provide us with the precise location of the forecast request. Please specify the precise latitude and longitude. If you can, please specify the name of the 7 ½ minute USGS quadrangle map where the site is located. We will check that against the lat/lon location that you give to ensure it is correct. The elevation (in feet) at the top and bottom of the site should be entered in the "Elevation" boxes. Enter the name of the nearest drainage in the "Drainage" box. Enter the slope aspect, such as NE or S (or FLAT or RIDGE) in the "Aspect" box. This helps us further locate the site. Also, if the request is for a fire support, please enter the size of the burn (in acres) in the "Size" box.

Fuel Section-

Please indicate the type of fuel, either using fuel model numbers, or a description of the fuel such as "grass", "Ponderosa Pine", etc. Also, if you can indicate the amount of fuel sheltering where the observations were taken, it helps us tremendously in providing accurate wind forecasts. Please be aware not all forecasters are familiar with fuel model types. If at all possible refer to a description of the fuel type.

Observation Section-

In this section, provide us with local observations near or at the site. This may involve using a sling psychrometer or an automated weather observation system. For each observation, we need to know where it is in relation to the site, the elevation (in feet) and the time (preferably using a 24-hour clock). The wind (in miles per hour) can be specified as "N12 Gust 25" or something like that. The temperature and wet-bulb values (in degrees F) should be entered and the RH (in percent) and dew point (in degrees F) can also be entered if known (we will calculate the dew point from the temperature, wet-bulb, and elevation if you do not provide them). Finally, any remarks about clouds, weather or other important information should be entered in the remarks box.

Forecast Elements Section-

Please provide what forecast elements you need, or are particularly important. Select the parameters that you need only for the forecast periods you need. If the forecaster believes something is particularly noteworthy, the requesting agency will be notified. If a spot request is submitted in the evening for the next day, keep in mind that you are requesting parameters for the day of the burn. For wildfires, we will provide all parameters (except smoke dispersion), so you do not need to take time filling this in, unless you have a parameter that is particularly critical. For forecast parameters that are not listed here or if a specific time frame is needed, the request may be made in the remarks section.

Remarks Section-

If there is something else that you think we need to know, or something you couldn't fit elsewhere on the form, please enter it here.

Submit the Form-

Click on the "Submit Request" button at the bottom of the page to send the request. If you want to cancel the request you can click on the "Cancel Request" button. To clear the form and start over again, you can click on the "Clear Form" button. When you submit the form, various checks are performed on the data you have entered. Some problems make it impossible for your request to be accepted (for example, if you forget to enter a name for the burn), while others will produce warnings and messages for your information. If an error is found, you will be given the opportunity to go back and fix the form, or cancel the request. As soon as your request is submitted, we will be automatically notified through our computer systems. If you have the time, we would appreciate it if you could still call us, just in case something goes wrong on the web and we don't get notified of your request (especially for a wildfire).

Spot Forecast Web Page-

After you have submitted a spot forecast request, an individualized spot forecast web page becomes available for that site. This page automatically updates every minute so as new information becomes available for the site, you see it immediately. Detailed maps of the area around the site are generated and displayed when they become available. Keep in mind that "sensitive" information like your name, phone number, and the exact location of the burn are NOT visible to others - only to you and the NWS.

If we have questions about your request, we may send you a message about it. If this happens, you will see a big red box in the forecast page, with our question. Usually, there is some problem with the request that you can easily fix (use the links at the bottom of the page to change the request) or you can call us.

When your forecast is complete, it will show up in the spot forecast web page automatically, and a box to provide feedback will become available. We hope that you can provide us feedback with how the forecast worked out, perhaps later in the day or several days down the road. This feedback helps us to improve our forecasts or points out areas of concern.

In the event of Internet or other communications failure, requesting agencies are encouraged to submit requests by faxing a completed Fire Weather Spot Forecast request. This form will be the standard form submitted for fire weather support and was derived through a cooperative effort between the NWS and the AOICC. When listing the location, requests should contain latitude/longitude coordinates, the quadrangle map name and a local reference.

Forecasters should be aware of the critical weather element thresholds for the spot forecast area. These thresholds are often determined by a fire behavior analyst or other fuels/fire behavior expert and define ranges of wind, relative humidity, etc. that, if realized, may cause significant increase (or decrease) in fire behavior. In most cases, such information can be obtained directly from the on-site requester. In the case of prescribed burns, these thresholds are often defined in the "Burn Plan", which is normally developed and approved well before a spot forecast is requested. If the forecaster on duty needs assistance in preparing spot forecasts for a wildfire, they should contact the FWPL meteorologist at home.

Forecasters are encouraged to keep an eye on conditions at the sites where spot forecasts have been requested and to issue an update if conditions are not representative of the forecast. Conversely, requesting agencies are encouraged to contact the appropriate National Weather Service office if the forecast does not seem to be panning out. The forecaster will use the nearest observation site which may not always be representative of the burn so on site observations are always encouraged. Updates will be issued as needed and the contact person will be notified that an updated forecast is pending. It will be the responsibility of the requesting agency to alert the crews in the field that an updated forecast is pending or has already been issued.

Specific parameters of interest to firefighters and others include:

Wind speed and direction - remember we are dealing with 20 ft surface winds over the mean vegetation. The 20-ft wind may be .50 to .75 of what the airport winds are running, depending on the type of vegetation. A shift in wind direction by 30 to 40 degrees can be critical. Note terrain features which may cause local scale winds such as slope winds or valley winds or funneling.

Humidity - humidity recovery at night can be as important as minimum relative humidity during the afternoon. Ridges exposed to winds at night may allow sufficient mixing so that humidity remains lower; thus, fire activity may continue through the night.

Inversions - strength of thermal inversions should be mentioned along with a forecast of when the inversion is likely to break up if applicable.

Remember that the operations around the fire are exposed to all the weather elements that present hazards to outdoor activities, such as lightning, thunderstorm winds, high heat index, dense fog, etc. Notify the dispatcher at the AOICC or the AFC dispatch center if the spot weather forecast is unrepresentative and an update is forthcoming.


In order to make sure that spot forecasts are as accurate as possible, the NWS verifies spot forecasts. The NWS asks that each spot forecast request be accompanied by a preliminary observation (recorded at the time of the request) and a follow-up observation (recorded at the time of maximum or minimum heating depending upon the time that the request was sent) at the burn site, if possible. User agencies should also understand that preliminary observations are critical to giving the spot forecast a significant improvement over the routine fire weather forecast.

Note: Spot forecasts may be used as general planning tools for the following day but this practice is not recommended. “Planning” type forecast information should be obtained from the routine fire weather forecast or the zone forecast product, and can be augmented by direct phone consultation with a forecaster on duty at the appropriate NWS office. Spot forecasts are intended to support ongoing or imminent wildfire or federal prescribed burn activity only.

Other Forecast Products


Graphical Forecasts

In addition to text products, the National Weather Service also issues graphical forecasts for most fire weather parameters. These graphics allow the user to quickly scan the entire forecast area and beyond and often, the fire weather parameter will extend beyond the time restraints of the routine fire weather product. These products break down the fire weather forecast parameters into three or six hour segments and are continuously updated. These graphics can be found off of any NWS homepage or by typing in <http://www.weather.gov/forecasts/graphical/sectors/conus.php#tabs>

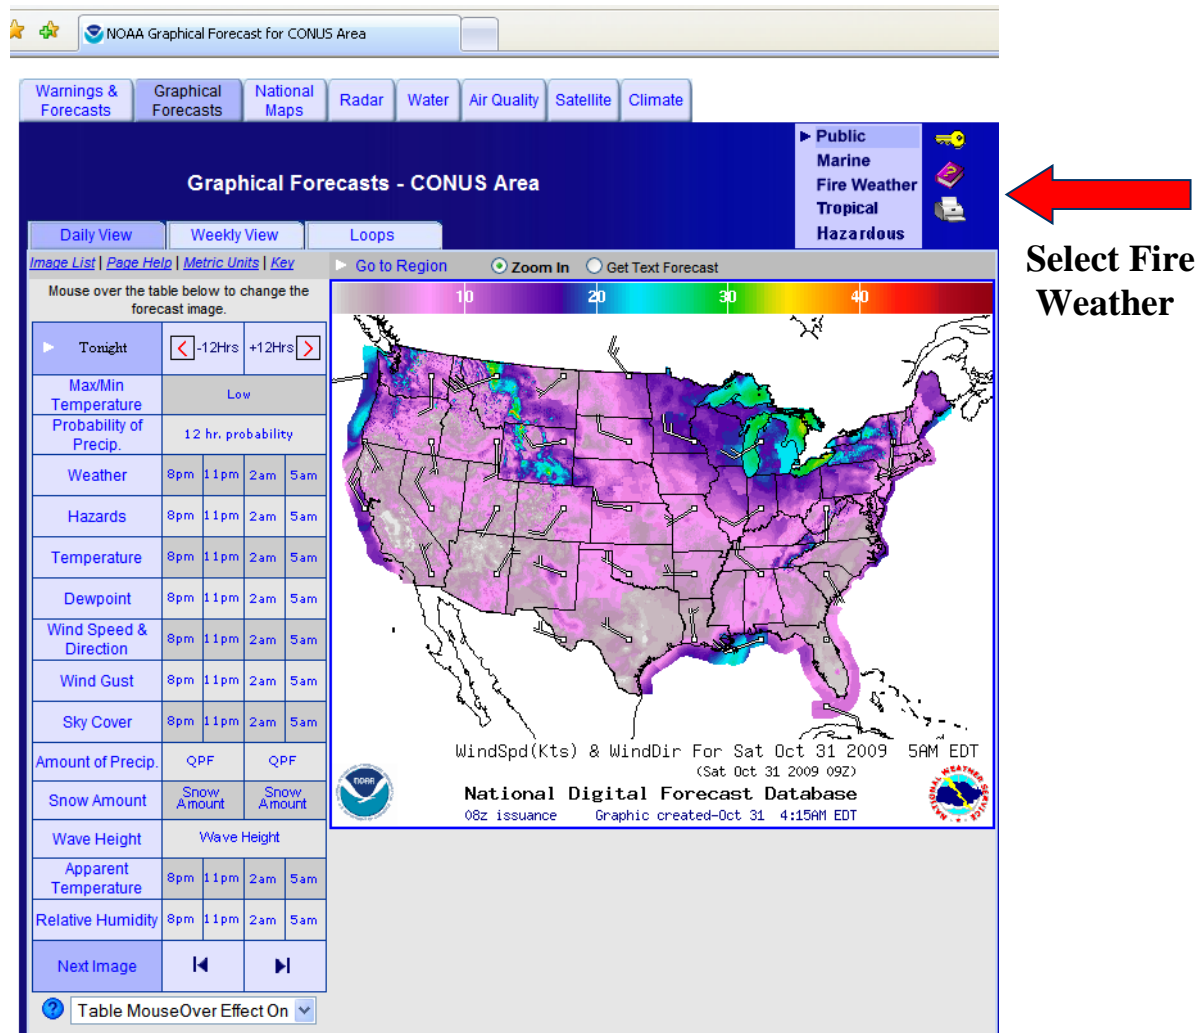



To zoom in on any particular region, simply click on the area on interest until the desired geographic area is selected.

Regional View

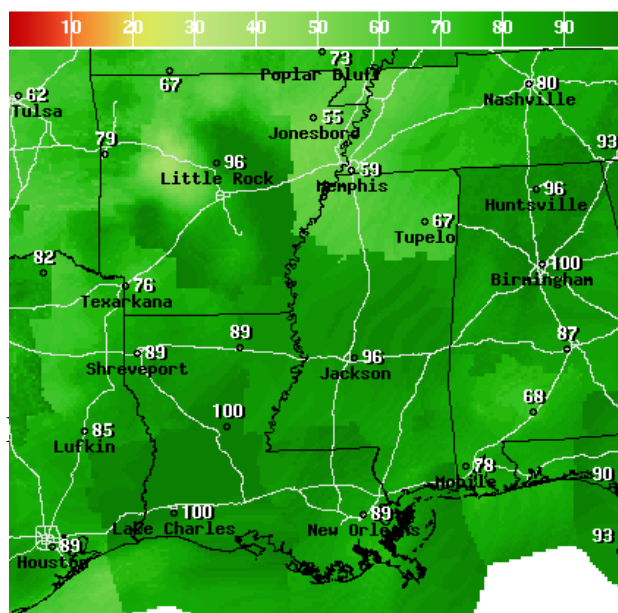

State View

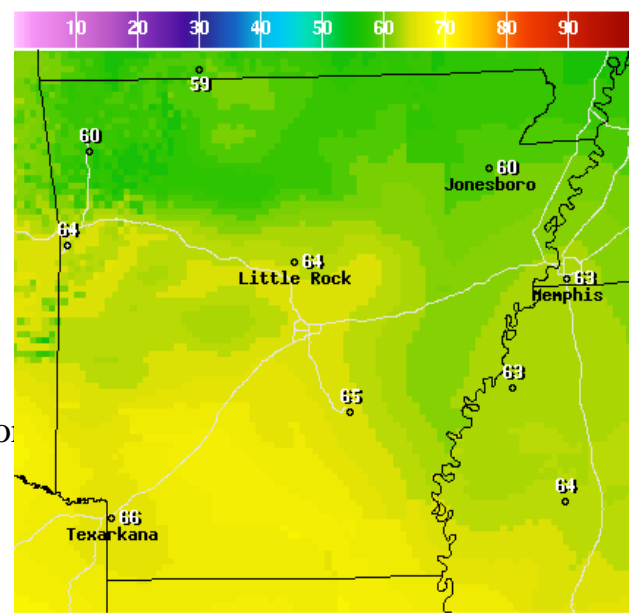

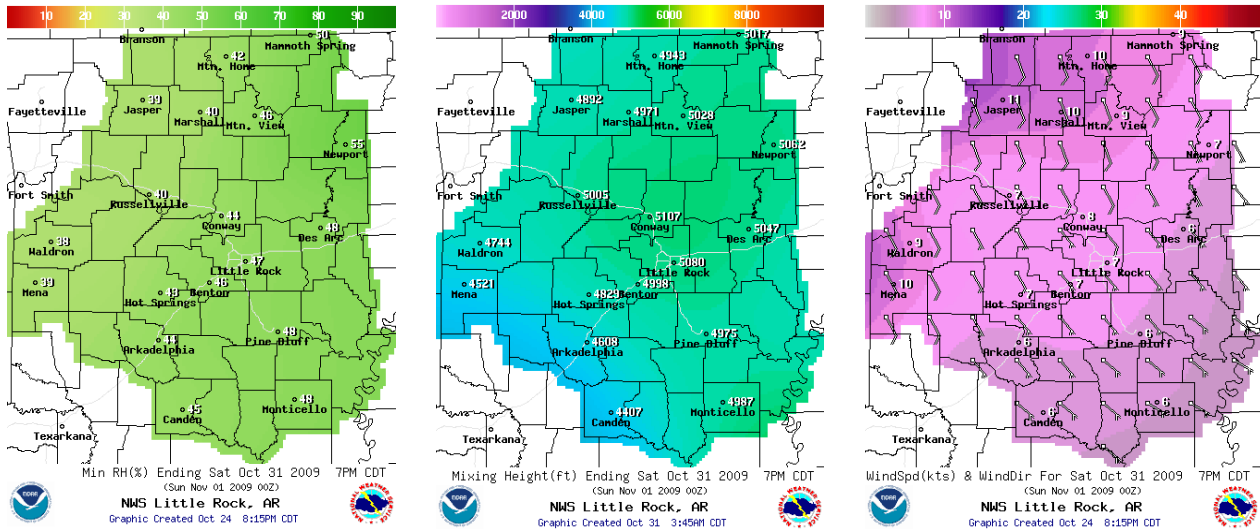

To obtain these products issued by the Little Rock office directly, follow this link:
<http://www.srh.noaa.gov/graphical/sectors/lzkFireDay.php#tabs>

Tabular and Meteogram Forecasts-


The National Weather Service also provides detailed tabular or meteogram forecasts. These forecasts allow the user to obtain detailed information that is broken down into hourly segments for a variety of forecast parameters. To obtain this information, start about halfway down on the National Weather Service's Little Rock office homepage and look for the box titled Point Forecasts.

Point Forecasts	
Cities in Arkansas	Coordinates (make sure "Lon" is negative)
Pick a City <input type="text"/>	Lat: <input type="text"/> Lon: <input type="text"/>
<input type="button" value="Regular Forecast"/> <input type="button" value="Printable Forecast"/> <input type="button" value="Meteogram"/> <input type="button" value="Tabular"/> <input type="button" value="Reset"/>	
Other Forecasts: Quick Links Tabular Point Tabular State	

The data may be obtained by using the drop down menu on the left for a myriad of specific cities or by typing in a specific latitude and longitude (making sure that the longitude is a negative number). The user may request a meteogram forecast or a tabular forecast by selecting the appropriate box.

An example of a meteogram forecast

[\[aasnes/oots\]](#) | [\[0/w\]](#) | [\[hide menu\]](#)

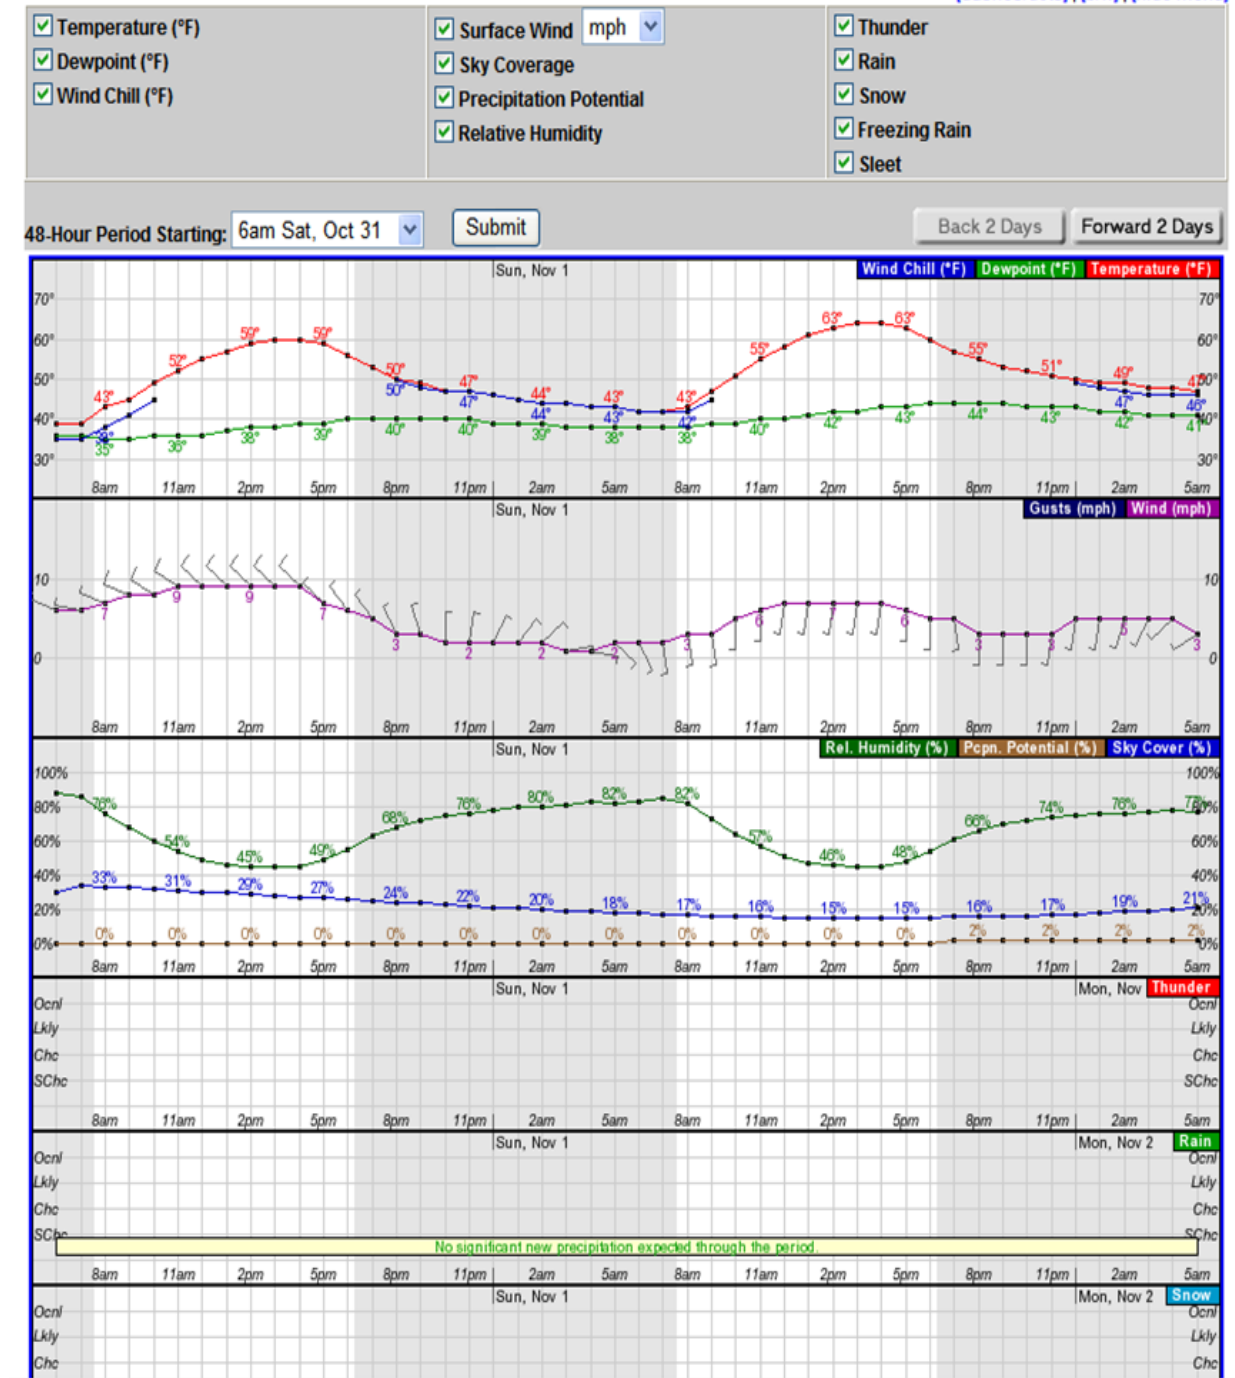

An example of a tabular forecast

[hide menu] | Font Size: [A](#)[A](#)[A](#)

<input checked="" type="checkbox"/> Temperature (°F) <input checked="" type="checkbox"/> Dewpoint (°F) <input checked="" type="checkbox"/> Wind Chill (°F)	<input checked="" type="checkbox"/> Surface Wind mph <input checked="" type="checkbox"/> Sky Coverage <input checked="" type="checkbox"/> Precipitation Potential <input checked="" type="checkbox"/> Relative Humidity	<input checked="" type="checkbox"/> Thunder <input checked="" type="checkbox"/> Rain <input checked="" type="checkbox"/> Snow <input checked="" type="checkbox"/> Freezing Rain <input checked="" type="checkbox"/> Sleet
--	---	---

48-Hour Period Starting: 7am Sat, Oct 31 Submit
Back 2 Days
Forward 2 Days

Date	10/31														11/01											
Hour (CDT)	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	00	01	02	03	04	05	06		
Temperature (°F)	39	43	45	49	52	55	57	59	60	60	59	56	53	50	49	47	47	46	45	44	44	43	43	42		
Dewpoint (°F)	36	35	35	36	36	37	37	38	38	39	39	40	40	40	40	40	40	39	39	39	38	38	38	38		
Wind Chill (°F)	35	38	41	45											50	48	47	47	46	45	44	44	43	42		
Wind (mph)	6	7	8	8	9	9	9	9	9	9	7	6	5	3	3	2	2	2	2	2	1	1	2	2		
Wind Dir	W	W	WNW	WNW	WNW	NW	NW	NW	NW	NW	NW	NW	NW	NNW	NNW	N	N	NNE	NNE	NE	ENE	E	SE	SSE		
Gust																										
Sky Cover (%)	34	34	33	32	31	31	30	29	28	28	27	26	25	25	24	23	22	22	21	20	19	19	18	18		
Pcpn. Potential (%)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Rel. Humidity (%)	86	76	68	60	54	50	46	45	45	45	49	55	63	68	72	75	76	78	80	80	81	83	82	83		
Thunder	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--		
Rain	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--		
Snow	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--		
Freezing Rain	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--		
Sleet	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--		

Date															11/02											
Hour (CDT)	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	00	01	02	03	04	05	06		
Temperature (°F)	42	43	47	51	55	58	61	63	64	64	63	60	57	55	53	52	51	50	49	49	48	47	47	47		
Dewpoint (°F)	38	38	39	39	40	40	41	42	42	43	43	44	44	44	44	43	43	43	42	42	41	41	41	40		
Wind Chill (°F)	42	42	45															48	47	47	46	45	46	46		
Wind (mph)	2	3	3	5	6	6	7	7	7	7	6	5	5	3	3	3	3	5	5	5	5	5	3	3		
Wind Dir	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	SSW	SSW	SW	WSW	WSW		
Gust																										
Sky Cover (%)	17	17	16	16	16	15	15	15	15	15	15	15	16	16	16	16	17	17	18	19	19	20	21	22		
Pcpn. Potential (%)	0	0	0	0	0	0	0	0	0	0	0	0	2	2	2	2	2	2	2	2	2	2	2	2		
Rel. Humidity (%)	85	82	73	64	57	51	48	46	45	45	49	54	62	66	70	73	74	75	76	76	77	78	77	78		

Fire Weather Point Forecast Matrices-

The National Weather Service also issues a product for specific locations called a Fire Weather Point Forecast Matrix or PFW. The PFW is an easily accessible tabular forecast data that is tailored toward fire behavior applications and includes forecasts of numerous fire weather parameters broken into three or six hour segments. The PFW's are generated for the Remote Automated Weather Station (RAWS)/NFDRS sites and specific Automated Surface Observing System (ASOS) sites from the local WFO's Digital Forecast Database. The PFW's are updated at least twice a day and more often as conditions warrant. This product is still determined to be experimental and is for planning and review purposes only. It is not to be substituted for an official fire weather spot forecast

An example of Fire Weather Point Forecast

DEVILS KNOB RAWS-JOHNSON AR
35.62N 93.30W ELEV. ??? FT
330 PM CST SAT JAN 17 2009

DATE	SAT 01/17/09								SUN 01/18/09								MON 01/19/09								
UTC 3HRLY	09	12	15	18	21	00	03	06	09	12	15	18	21	00	03	06	09	12	15	18	21	00	03	06	09
CST 3HRLY	03	06	09	12	15	18	21	00	03	06	09	12	15	18	21	00	03	06	09	12	15	18	21	00	03
MAX/MIN						52				29				48				26							43
TEMP						45	39	36	33	31	34	43	47	40	36	33	30	28	31	39	42	39			
DEWPT						32	30	27	26	25	25	26	25	24	23	22	21	22	24	26	27	26			
MIN/MAX RH						38				77				43				79							54
RH						61	71	69	73	77	68	50	43	51	58	63	69	78	75	61	54	61			
WIND DIR						W	NW	NW	NW	W	NW	NW	NW	NW	NW	NW	NW	NW	NW	NW	NW	NW	NW	NW	NW
WIND SPD						6	4	5	4	4	6	10	9	8	6	5	4	5	6	8	6	6			
WIND CHILL									30		25	27	36		34	29	27	24	21	24	32				33
CLOUDS						CL	CL	CL	FW	SC	SC	SC	SC	SC	B1	B1	B1	B1	B1	B2	B2	B2			
CLOUDS(%)						0	0	3	21	45	50	48	44	44	55	66	62	56	62	70	73	72			
POP 12HR						0				5				5			5								5
QPF 12HR						0				0				0			0								0
LW LVL HAINES								4		3		4		4		4		4							
STABILITY							6		3		3		5		5		3		3		5				
MAX. MIX HGT							1400		1600		3800		3800		1400		1600		4400		4400				
1700 MHGT T											39		39						32		32				
T WIND DIR							NW		NW		NW		NW		NW		NW		NW		NW				NW
T WIND SPD							25		23		20		27		31		25		20		25				25

DATE		TUE 01/20/09				WED 01/21/09				THU 01/22/09				FRI 01/23/09			
UTC 6HRLY	06	12	18	00	06	12	18	00	06	12	18	00	06	12	18	00	
CST 6HRLY	00	06	12	18	00	06	12	18	00	06	12	18	00	06	12	18	
MIN/MAX		29	48			27	56			33	59			37	47		
TEMP	34	32	43	41	33	26	48	49	40	36	52	52	44	38	42	42	
DEWPT	24	23	24	25	24	23	29	31	31	31	32	34	35	35	36	34	
MAX/MIN RH		71	42			100	37			80	41			91	65		
RH	68	71	47	53	69	86	48	51	69	80	47	51	70	91	79	72	
PWIND DIR		NW		NW		W											
WIND CHAR		<15		<15		<15											
AVG CLOUDS	B1	SC	SC	SC	FW	FW	FW	FW	FW	SC	SC	B1	B1	B1	B1	B1	
POP 12HR		0		0		0		0		5		20		20		10	
RAIN SHWRS												IS	IS	IS			

National Fire Danger Rating System (NFDRS) Site Specific Forecasts

What is NFDRS?

The National Fire Danger Rating System measures wildfire danger at key points throughout the United States. "Fire danger" in NFDRS parlance, means a daily evaluation of the potential for wildfire ignition, growth and intensity over a broad sampling area. NFDRS takes into account many different vegetative types throughout the United States, their annual growth cycles, seasonal climate trends, local topography, fuels, and the effect of daily weather changes.

Fire managers receive numeric output that suggests the severity of fire danger. In general, one or more fire weather observation sites are carefully located in the forest in order to represent the worst conditions. Observations are taken once per day. Ideally, the NFDRS weather observations are taken at the hottest, driest and windiest time of the afternoon. This is because NFDRS is supposed to model the "worst case" fire conditions possible during the day. The ideal site would be one on a south and west facing aspect with no nearby obstructions. In reality, few locations meet these stringent criteria. The NFDRS is not intended to be "site specific" like the Fire Behavior Prediction System but rather a general overview of fire danger. Effective fire suppression planning depends heavily on NFDRS because it is an objective tool for predicting the difficulty of suppressing a wildfire.

What is the role of the National Weather Service in NFDRS?

The National Weather Service role in NFDRS is forecasting weather trends which allow NFDRS to predict the next day's fire danger indices. Daily weather observations entered into NFDRS by the fire agencies form the basis of the trend forecast input by the NWS. Each NFDRS reporting site is located at a spot which is representative of the terrain and fuel types dominant in that area. The NFDRS reporting sites are also RAWS (Remote Automated Weather Station) stations whose weather information is available on the internet or through WIMS (Weather Management and Information System).

The basic time of observation each day is 1 PM CST or 2 PM CDT. The observation should be entered into WIMS no later than 145 PM CST or 245 PM CDT. The National Weather Service is obligated to prepare site specific forecasts for these NFDRS sites. These forecasts will be entered into the NWS computer system no later than 345 PM CST/CDT and will be available in WIMS shortly thereafter. The NFDRS forecast consists of two separate and distinct parts. The first part is a time specific forecast for the basic time of observation (1 PM CST or 2 PM CDT). Note: Remember the NFDRS weather observations are at what is supposed to be the hottest, driest and windiest time of the afternoon. Thus, the time specific forecast is made for this time. The second part is a forecast for certain parameters during the 24 hours between the basic observation time on the day the forecast is being prepared and the basic observation time for the following day.

NFDRS Site Specific Forecast Points

Site	Elevation	Lat / Long	Site I.D.
Strickler	1630 feet	35.87 N / -94.30 W	STKA4
Silver Hill	928 feet	35.97 N / -92.75 W	SVHA4
Devils Knob	2099 feet	35.62 N / -93.3 W	DKBA4
Booneville	656 feet	35.15 N / -93.90 W	BNVA4
Oden	895 feet	34.62 N / -93.8 W	ODEA4
Jessieville	898 feet	34.69 N / -93.22 W	JVLA4
Felsenthal	105 feet	33.12 N / -92.19 W	LRRA4
Evening Shade	540 feet	36.11 N / -91.56 W	ESDA4
Guy	610 feet	35.32 N / -92.28 W	GYAA4
Sheridan	270 feet	34.27 N / -92.39 W	SDNA4
Bluff City	360 feet	33.69 N / -93.16 W	BLRA4
Poinsett	335 feet	35.53 N / -90.69 W	LPSA4
Monticello	183 feet	33.59 N / -91.80 W	AMOA4
St. Francis	300 feet	34.76 N / -90.72W	SFFA4
Blanchard Springs	1200 feet	35.97N / -92.19	BSCA4
Armstead Mountain	1600 feet	35.57N / -92.82	AMAA4
Compton	2365 feet	36.07 N / -93.36	CMTTA4

Offices that issue NFDRS Site Specific Forecasts

Site	County	NFDRS Issuing Office
Strickler	Washington	Tulsa
Silver Hill	Searcy	Little Rock
Devils Knob	Johnson	Little Rock
Booneville	Logan	Little Rock
Oden	Montgomery	Little Rock
Jessieville	Garland	Little Rock
Felsenthal	Union	Shreveport
Evening Shade	Sharp	Little Rock
Guy	Faulkner	Little Rock
Sheridan	Grant	Little Rock
Bluff City	Nevada	Shreveport
Poinsett	Poinsett	Memphis
Monticello	Drew	Little Rock
St. Francis	Lee	Memphis
Blanchard Springs	Stone	Little Rock
Armstead Mountain	Pope	Little Rock
Compton	Newton	Little Rock

The single station forecast is in tabular form with the terminology as follows:

FCST,031201,070429,13,1,78,37,1,1,259,05,M,78,52,83,37,0,0,N

FCST,031201,070429,13- The administrative section of the forecast with the site identification (**031201**), followed by the date (**070429 in year/month/day format**) and the specific forecast time (**1300 hours**).

FCST,031201,070429,13,**1**,78,37,1,1,259,05,M,78,52,83,37,0,0,N

State of Weather - The state of weather is input as a code for the weather expected at basic observation time the next day. Forecasters will select the highest code when more than one type of weather is expected. For example, if both fog and rain are anticipated at basic observation time, the state of weather would be coded as six, the higher state of weather code.

Weather Codes for Single Station Forecasts

Weather Code	Sensible Weather
0	Clear Skies
1	Scattered Clouds
2	Broken Clouds
3	Overcast Conditions
4	Fog
5	Drizzle
6	Rain
7	Snow
8	Showers
9	Thunderstorms

FCST,031201,070429,13,1,78,37,1,1,259,05,M,78,52,83,37,0,0,N

Temperature and humidity - The forecaster will enter the temperature in degrees Fahrenheit, and the relative humidity in whole percent expected at observation time.

FCST,031201,070429,13,1,78,37,1,1,259,05,M,78,52,83,37,0,0,N

Lightning activity level - Currently these values default to 1 as dry lightning is a very rare event in Arkansas. The possibility of issuing a LAL for Arkansas is currently under review.

FCST,031201,070429,13,1,78,37,1,1,259,05,M,78,52,83,37,0,0,N

Wind direction and speed - The forecaster will enter the expected wind direction in degrees and the expected wind speed at the observation site in mph. The wind speed at a fire weather station is the average of the speed measured over a 10 minute period. Wind speeds measured at a fire weather station usually do not compare with the ASOS 10 meter winds measured at airports. Wind speeds are observed to be lower over the rougher terrain of a forest as compared to the observation site at an airport. The 10- minute average wind at the 20 foot level will produce lower wind speeds than the 2- minute ASOS winds. The forecast wind speed will reflect the lower wind speeds at fire weather stations by reducing the forecast wind speed by 70%.

FCST,031201,070429,13,1,78,37,1,1,259,05,M,78,52,83,37,0,0,N

24 hour forecasts - The forecaster will follow the basic observation time forecasts with the maximum temperature expected during the 24 hour period from basic observation time the day the forecast is being prepared to the basic observation time the following day. This is followed by a forecast of minimum temperature, maximum humidity and minimum humidity expected in the same 24-hour time frame.

FCST,031201,070429,13,1,78,37,1,1,259,05,M,78,52,83,37,0,0,N

Precipitation time duration - The forecaster will enter the expected duration of precipitation in whole hours that will fall at the site for the first 16 hours of the forecast between basic observation times. This sixteen hour forecast will be followed by a forecast of the expected duration of precipitation in whole hours that will fall at the site for the final eight hours of the forecast between basic observation times.

FCST,031201,070429,13,1,78,37,1,1,259,05,M,78,52,83,37,0,0,N

Wet Fuels Condition- A wet fuels condition anticipated at the next basic observation time is entered next. If the forecaster expects fuels to be wet, a Y for yes will be entered. If the forecaster feels fuels will not be wet, an N for no will be entered. Basically, this parameter will be yes when liquid water, ice or snow, will be sitting on the fuels at observation time, i.e., really soaked! Use yes with caution as all indices in the NFDRS are set to zero when wet fuels are forecast.

Update policy



An agreement is in effect with the AOICC (Arkansas Oklahoma Interagency Coordination Center), located in Hot Springs, concerning updates and significant changes in sensible weather. The fire management officers check the morning forecast before heading out into the field and will not be aware if an update is issued. If an update is issued, please call the AOICC at 501-321-5232 during normal working hours and 501-574-8758 after hours to inform them an update has been issued. They will notify personnel in the field. If a significant change in the weather is likely to occur, please call the AOICC and tell them what is going on. They are interested in strong to severe thunderstorms approaching the forests, sudden wind shifts, a drastic rise in temperature or a drastic drop in humidity. This agreement will eliminate the forecasters from calling specific districts. The forecaster only has to call the AOICC and they will notify the personnel in the field as applicable. Remember, people may be burning every day during fire season and sudden drastic weather changes may affect fire behavior and more important, pose a hazard to the people in the field.

No official agreement is in place with the Arkansas Forestry Commission. As a courtesy, the AFC dispatch center in Malvern should be contacted at 501-332-2000 to inform them that a change to the forecast is forthcoming. They in turn will notify any of their personnel in the field about the update to ensure fire fighter safety

National Weather Service Offices

All NWS offices issue fire weather forecasts and other fire weather products for their area of responsibility. In addition to the required forecast parameters and information on any fire weather watches and red flag warnings in effect, the routine fire weather forecast offers additional parameters based on customer need and local criteria. All fire weather forecasts are required to include a brief synopsis and forecasts of sky and weather conditions, probability of precipitation, maximum and minimum temperature, maximum and minimum humidity and wind over a specified time. All forecasts are also required to include an extended forecast of three to seven days which will include all of the mandatory forecast elements.

Fire weather forecasts may include optional elements below the required set of required. National Weather Service offices have the choice of including local optional elements in as many periods as desired in both the morning and afternoon forecasts. These elements will vary between offices and are selected on customer needs.

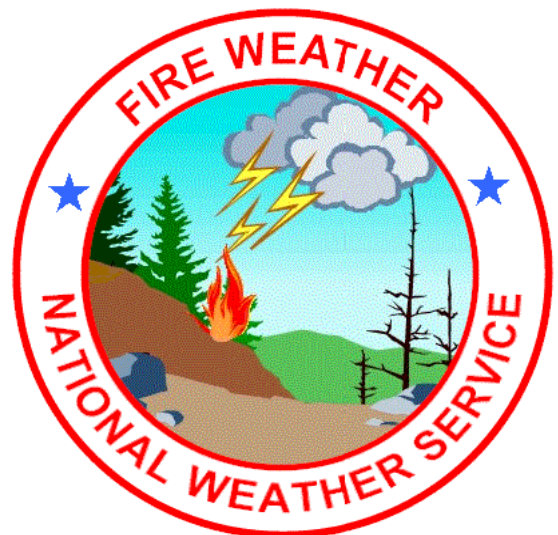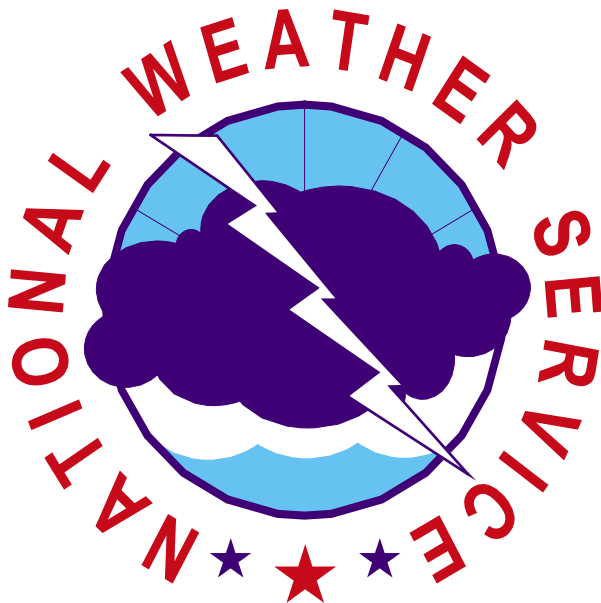

National Weather Service - Little Rock, Arkansas

8400 Remount Rd - North Little Rock, AR 72118

Phone: 501-834-3955; Fax: 501-834-2019

Internet address: <http://www.srh.noaa.gov/lzk>

Meteorologist in Charge: Steven Drillette

Warning Coordination Meteorologist: Dennis Cavanaugh

Fire Weather Program Leader and (IMET): Joe Goudsward

The Little Rock National Weather Service Office has responsibility for fire weather services in the following counties in Arkansas:

Arkansas	Conway	Hot Spring	Lonoke	Polk	Stone
Baxter	Dallas	Independence	Marion	Pope	Van Buren
Boone	Desha	Izard	Montgomery	Prairie	White
Bradley	Drew	Jackson	Monroe	Pulaski	Woodruff
Calhoun	Faulkner	Jefferson	Newton	Saline	Yell
Clark	Fulton	Johnson	Ouachita	Scott	
Cleveland	Garland	Lincoln	Perry	Searcy	
Cleburne	Grant	Logan	Pike	Sharp	

National Fire Danger Rating System Single Station Forecast Sites in Arkansas:

Blanchard Springs	Booneville
Devils Knob	Evening Shade
Guy	Jessieville
Oden	Silver Hill
Monticello	Armstead Mountain
Compton	

Federal Land Agencies in Arkansas Served:

Ouachita National Forest	Cache River/Bald Knob National Wildlife Refuge	Hot Springs National Park
Ozark National Forest	Holla Bend National Wildlife Refuge	Arkansas Post National Monument
Buffalo National River	White River National Wildlife Refuge	Felsenthal/Overflow National Wildlife Refuge

Red Flag Criteria:

For **a Red Flag Warning**, all three of the following criteria must be met.

- 1) Afternoon minimum relative humidity expected to be 25% or lower.
- 2) 20-foot sustained winds of 14 mph or greater.
- 3) Critically dry 10-hour fuel moisture. Values less than 10 percent are considered critical.

Routine Fire Weather Products Issued:

Fire Weather Forecast (product identifier LITFWFLZK; WMO Header FNUS54 KLZK). Fire weather forecasts from the National Weather Service Office in Little Rock are issued twice a day. The first issuance is in the morning around 730 am and the latter around 330 pm. The forecast will be updated if conditions warrant. In the event of communications failure or any other circumstance that would prevent fire weather products from being issued by the National Weather Service Forecast Office in Little Rock, Arkansas responsibility will fall upon the National Weather Service Forecast Office in Memphis, Tennessee. In the event Memphis is unable to assume responsibility, fire weather services would be provided by the National Weather Service Forecast office in Tulsa, Oklahoma.

In addition to the required forecast parameters and information on any fire weather watches and red flag warnings in effect, the routine fire weather forecast offers additional parameters, including precipitation amount, precipitation duration, 1700 ft mixing height temperatures, mixing heights, transport wind speed and direction, Haines index, stability class and 20 foot winds. An example of the Little Rock Fire Weather Forecast is included in Appendix 8.

National Weather Service - Memphis, Tennessee

7777 Walnut Grove Road-OM1CR

Memphis, TN 38120

Phone: 901-544-0401; Fax: 901-544-0414

Internet address: <http://www.srh.noaa.gov/meg>

Meteorologist in Charge: Jim Belles

Warning Coordination Meteorologist: Gary Woodall

Fire Weather Program Leader: John Sirmon

The Memphis National Weather Service Office has responsibility for fire weather services in the following counties in Arkansas:

Clay	Crittenden	Green	Lee	Phillips	Randolph
Craighead	Cross	Lawrence	Mississippi	Poinsett	St Francis

National Fire Danger Rating System Single Station Forecast Sites in Arkansas:

Poinsett	St. Francis
----------	-------------

Federal Land Agencies in Arkansas Served:

St. Francis National Forest	Big Bend Lake National Wildlife Refuge	Wapanoca National Wildlife Refuge
-----------------------------	--	-----------------------------------

Red Flag Criteria:

For a **Red Flag Warning**, both of the following criteria must be met.

- 1) Afternoon minimum relative humidity expected to be 25% or lower.
- 2) 20-foot sustained winds of 14 mph or greater.

Routine Fire Weather Products Issued:

Fire Weather Forecast (product identifier MEMFWFMEG; WMO Header FNUS54 KMEG). Fire weather forecasts from the National Weather Service Office in Memphis are issued twice a day. The first issuance is in the morning around 600 am and the latter around 330 pm. The forecast will be updated if conditions warrant. In the event of communications failure or any other circumstance that would prevent fire weather products from being issued by the National Weather Service Forecast Office in Memphis, responsibility will fall upon the National Weather Service Forecast Office in Little Rock, Arkansas. In the event Little Rock is unable to assume responsibility, fire weather services would be provided by the National Weather Service Forecast office in Nashville, Tennessee.

In addition to the required forecast parameters and information on any fire weather watches and red flag warnings in effect, the routine fire weather forecast offers additional parameters, including precipitation amount, precipitation duration, precipitation beginning and ending time, 20-foot winds, 1700-ft mixing height, transport winds, ventilation index, stability and stagnation index. An example of the Memphis Fire Weather Forecast is included in Appendix 8.

National Weather Service –Tulsa, Oklahoma

10159 E. 11th St. Suite 300

Tulsa, OK 74128

Phone Number: 918-832-4116; Fax: 918-832-4101

Internet address: <http://www.srh.noaa.gov/tulsa>

Meteorologist in Charge: Steven Piltz

Warning Coordination Meteorologist: Ed Calianese

Fire Weather Program Leader: Craig Sullivan

The Tulsa National Weather Service Office has responsibility for fire weather services in the following counties in Arkansas:

Benton	Crawford	Madison	Washington
Carroll	Franklin	Sebastian	

National Fire Danger Rating System Single Station Forecast Sites in Arkansas:

Strickler	
-----------	--

Federal Land Agencies in Arkansas Served:

Ouachita National Forest	Pea Ridge National Military Park
Ozark National Forest	Fort Smith National Historic Site

Red Flag Criteria;

For a **Red Flag Warning**, all three of the following criteria must be met.

- 1) Afternoon minimum relative humidity expected to be 25% or lower.
- 2) 20-foot sustained winds of 14 mph or greater.
- 3) Critically dry 10-hour fuel moisture. Values less than 10 percent are considered critical.

Fire Weather Forecast (product identifier OKCFWFTSA; WMO Header FNUS54 KTSA). Fire weather forecasts from the National Weather Service office in Tulsa are issued twice a day. The first issuance is in the morning around 730 am and the latter around 330 pm. The forecast will be updated if conditions warrant. In the event of communications failure or any other circumstance that would prevent fire weather products from being issued by the National Weather Service Forecast Office in Tulsa responsibility will fall upon the National Weather Service Forecast Office in Norman, Oklahoma. In the event Norman is unable to assume responsibility, fire weather services would be provided by the National Weather Service Forecast office in Little Rock, Arkansas.

In addition to the required forecast parameters and information on any fire weather watches and red flag warnings in effect, the routine fire weather forecast offers additional parameters, including precipitation amount, precipitation type, 1700-ft mixing height temperatures, mixing heights, transport winds, 20-foot winds, Haines index, stability, and ventilation rate. An example of the Tulsa Fire Weather Forecast is included in Appendix 8.

National Weather Service – Shreveport, Louisiana

5655 Hollywood Ave.

Shreveport, LA 71109

Phone: 318-636-7345 Fax: 318-636-9620

Internet address: <http://www.srh.noaa.gov/shv>

Meteorologist in Charge: Mario Valverde

Warning Coordination Meteorologist: Bill Parker

Fire Weather Program Leader: Marty Mayeaux

The Shreveport National Weather Service Office has responsibility for fire weather services in the following counties in Arkansas:

Columbia	Lafayette	Nevada
Hempstead	Little River	Sevier
Howard	Miller	Union

National Fire Danger Rating System Single Station Forecast Sites

Bluff City	Felsenthal
------------	------------

Federal Land Agencies in Arkansas Served:

Felsenthal/Overflow National Wildlife Refuge	Ouachita National Forest, Oklahoma Ranger District – Broken Bow
---	--

Red Flag Criteria:

For a **Red Flag Warning**, all three of the following criteria must be met.

- 1) Sustained 20 foot winds of 25 mph or higher at ASOS sites and/or 20 mph or higher at RAWs sites.
- 2) Relative Humidities of 25% or less.
- 3) Critically dry fuel moisture.

Fire Weather Forecast (product identifier NEWFWFSHV; WMO Header FNUS54 KSHV). Fire weather forecasts from the National Weather Service Office in Shreveport are issued twice a day. The first issuance is in the morning around 730 am and the latter around 330 pm. The forecast will be updated if conditions warrant. In the event of communications failure or any other circumstance that would prevent fire weather products from being issued by the National Weather Service Forecast Office in Shreveport, responsibility will fall upon the National Weather Service Forecast Office in Fort Worth, Texas. In the event Fort Worth is unable to assume responsibility, fire weather services would be provided by the National Weather Service Forecast office in Jackson, Mississippi.

In addition to the required forecast parameters and information on any fire weather watches and red flag warnings in effect, the routine fire weather forecast offers additional parameters, including precipitation amount, precipitation duration, 1700-ft mixing height temperatures, mixing heights, transport winds, 20-foot winds, stability class and category day. An example of the Shreveport Fire Weather Forecast is included in Appendix 8.

National Weather Service – Jackson, Mississippi

234 Weather Service Drive, Jackson, MS 39208

Phone: 601-939-2786; Fax: 601-965-4028

Internet address: <http://www.srh.noaa.gov/jan>

Meteorologist in Charge: Vacant

Warning Coordination Meteorologist: Steve Wilkinson

Fire Weather Program Leader: Eric Carpenter

The Jackson National Weather Service Office has responsibility for fire weather services in the following counties in Arkansas:

Ashley	Chicot
--------	--------

National Fire Danger Rating System Single Station Forecast Sites in Arkansas:

None

Federal Land Agencies in Arkansas Served: None

Red Flag Criteria:

For a **Red Flag Warning**, all the following criteria must be met.

- 1) Afternoon minimum relative humidity less than 25%.
- 2) 20-foot sustained winds of 14 mph or greater.
- 3) Keetch-Byram Drought Index of greater than 700.

Fire Weather Forecast (product identifier JANFWFJAN; WMO Header FNUS54 KJAN): Fire weather forecasts from the National Weather Service in Jackson office are issued twice a day. The first issuance is in the morning around 730 am and the latter around 330 pm. The forecast will be updated if conditions warrant. In the event of communications failure or any other circumstance that would prevent fire weather products from being issued by the National Weather Service Forecast Office in Jackson, responsibility will fall upon the National Weather Service Forecast Office in Huntsville, Alabama. In the event Huntsville is unable to assume responsibility, fire weather services would be provided by the National Weather Service Forecast office in Shreveport, Louisiana.

In addition to the required forecast parameters and information on any fire weather watches and red flag warnings in effect, the routine fire weather forecast offers additional parameters, including precipitation amount, precipitation duration, 1700 ft mixing height temperatures, mixing heights, transport winds, stagnation index, ventilation index, stability, category day and wind shifts. An example of the Jackson Fire Weather Forecast is included in Appendix 8.

Appendix 1: Wildland Fire Terminology



Aerial Fuels: All live and dead vegetation in the forest canopy or above surface fuels, including tree branches, twigs and cones, snags, moss, and high brush.

Aerial Ignition: Ignition of fuels by dropping incendiary devices or materials from aircraft.

Air Tanker: A fixed-wing aircraft equipped to drop fire retardants or suppressants.

Anchor Point: An advantageous location, usually a barrier to fire spread, from which to start building a fireline. An anchor point is used to reduce the chance of firefighters being flanked by fire.

Aramid: The generic name for a high-strength, flame-resistant synthetic fabric used in the shirts and jeans of firefighters. Nomex, a brand name for aramid fabric, is the term commonly used by firefighters.

Aspect: Direction toward which a slope faces.

Backfire: A fire set along the inner edge of a fireline to consume the fuel in the path of a wildfire and/or change the direction of force of the convection column.

Backpack Pump: A portable sprayer with hand-pump, fed from a liquid-filled container fitted with straps, used mainly in fire and pest control.

Behave: A system of interactive computer programs for modeling fuel and fire behavior that consists of two systems: BURN and FUEL.

Bladder Bag: A collapsible backpack portable sprayer made of neoprene or high strength nylon fabric fitted with a pump.

Blow-up: A sudden increase in fire intensity or rate of spread strong enough to prevent direct control or to upset control plans. Blow-ups are often accompanied by violent convection and may have other characteristics of a fire storm.

Brush: A collective term that refers to stands of vegetation dominated by shrubby, woody plants, or low growing trees, usually of a type undesirable for livestock or timber management.

Brush Fire: A fire burning in vegetation that is predominantly shrubs, brush and scrub growth.

Bucket Drops: The dropping of fire retardants or suppressants from specially designed buckets slung below a helicopter.

Buffer Zones: An area of reduced vegetation that separates wildlands from vulnerable residential or business developments. This barrier is similar to a greenbelt in that it is usually used for another purpose such as agriculture, recreation areas, parks, or golf courses.

Bump-up Method: A progressive method of building a fireline on a wildfire without changing relative positions in the line. Work is begun with a suitable space between workers. Whenever one worker overtakes another, all workers ahead move one space forward and resume work on the uncompleted part of the line. The last worker does not move ahead until completing his or her space.

Burn Out: Setting fire inside a control line to widen it or consume fuel between the edge of the fire and the control line.

Burning Ban: A declared ban on open air burning within a specified area, usually due to sustained high fire danger.

Burning Conditions: The state of the combined factors of the environment that affect fire behavior in a specified fuel type.

Burning Index: An estimate of the potential difficulty of fire containment as it relates to the flame length at the most rapidly spreading portion of a fire's perimeter.

Burning Period: That part of each 24-hour period when fires spread most rapidly, typically from 10:00 a.m. to sundown.

Campfire: As used to classify the cause of a wildland fire, a fire that was started for cooking or warming that spreads sufficiently from its source to require action by a fire control agency.

Candling: A single tree or a small clump of trees which is burning from the bottom up.

Chain: A unit of linear measurement equal to 66 feet.

Closure: Legal restriction, but not necessarily elimination of specified activities such as smoking, camping, or entry that might cause fires in a given area.

Cold Front: The leading edge of a relatively cold air mass that displaces warmer air. The heavier cold air may cause some of the warm air to be lifted. If the lifted air contains enough moisture, the result may be cloudiness, precipitation, and thunderstorms. If both air masses are dry, no clouds may form. Following the passage of a cold front in the Northern Hemisphere, westerly or northwesterly winds of 15 to 30 or more miles per hour.

Cold Trailing: A method of controlling a partly dead fire edge by carefully inspecting and feeling with the hand for heat to detect any fire, digging out every live spot, and trenching any live edge.

Command Staff: The command staff consists of the information officer, safety officer and liaison officer. They report directly to the incident commander.

Complex: Two or more individual incidents located in the same general area which are assigned to a single incident commander or unified command.

Contain a fire: A fuel break around the fire has been completed. This break may include natural barriers or manually and/or mechanically constructed line.

Control a fire: The complete extinguishment of a fire, including spot fires. Fireline has been strengthened so that flare-ups from within the perimeter of the fire will not break through this line.

Control Line: All built or natural fire barriers and treated fire edge used to control a fire.

Cooperating Agency: An agency supplying assistance other than direct suppression, rescue, support, or service functions to the incident control effort; e.g., Red Cross, law enforcement agency, Telephone Company, etc.

Creeping Fire: A fire with a low flame that is spreading slowly.

Crew Boss: A person in supervisory charge of usually 16 to 21 firefighters and responsible for their performance, safety, and welfare.

Crown Fire (Crowning): The movement of fire through the crowns of trees or shrubs more or less independently of the surface fire.

Curing: Drying and browning of herbaceous vegetation or slash.

Dead Fuels: Fuels with no living tissue in which moisture content is governed almost entirely by atmospheric moisture (relative humidity and precipitation), dry-bulb temperature, and solar radiation.

Debris Burning: A fire spreading from any fire originally set for the purpose of clearing land or for rubbish, garbage, range, stubble, or meadow burning.

Defensible Space: An area either natural or manmade where material capable of causing a fire to spread has been treated, cleared, reduced, or changed to act as a barrier between an advancing wildland fire and the loss to life, property, or resources. In practice, "defensible space" is defined as an area a minimum of 30 feet around a structure that is cleared of flammable brush or vegetation.

Detection: The act or system of discovering and locating fires.

Direct Attack: Any treatment of burning fuel, such as by wetting, smothering, or chemically quenching the fire or by physically separating burning from unburned fuel.

Dispatch: The implementation of a command decision to move a resource or resources from one place to another.

Dispatcher: A person employed who receives reports of discovery and status of fires, confirms their locations and takes action promptly to provide people and equipment likely to be needed for control in first attack, and sends them to the proper place.

Dispatch Center: A facility from which resources are directly assigned to an incident.

Division: Divisions are used to divide an incident into geographical areas of operation. Divisions are established when the number of resources exceeds the span-of-control of the operations chief. A division is located with the Incident Command System organization between the branch and the task force/strike team.

Dozer: Any tracked vehicle with a front-mounted blade used for exposing soil.

Dozer Line: Fireline constructed by the front blade of a dozer.

Drip Torch: Hand-held device for igniting fires by dripping flaming liquid fuel on the materials to be burned; consists of a fuel fount, burner arm, and igniter. Fuel used is generally a mixture of diesel and gasoline.

Drop Zone: Target area for air tankers, helitankers, and cargo dropping.

Drought Index: A number representing net effect of evaporation, transpiration, and precipitation in producing cumulative moisture depletion in deep duff or upper soil layers.

Dry Lightning Storm: Thunderstorm where negligible precipitation reaches the ground.

Duff: The layer of decomposing organic materials lying below the litter layer of freshly fallen twigs, needles, and leaves and immediately above the mineral soil.

Energy Release Component (ERC): The computed total heat released per unit area (British thermal units per square foot) within the fire front at the head of a moving fire.

Engine: Any ground vehicle providing specified levels of pumping, water and hose capacity.

Engine Crew: Firefighters assigned to an engine. The Fireline Handbook defines the minimum crew makeup by engine type.

Entrapment: A situation where personnel are unexpectedly caught in a fire behavior related, life-threatening position where planned escape routes or safety zones are absent, inadequate, or compromised. An entrapment may or may not include deployment of a fire shelter for its intended purpose. These situations may or may not result in injury. They include "near misses."

Environmental Assessment (EA): EAs were authorized by the National Environmental Policy Act (NEPA) of 1969. They are concise, analytical documents prepared with public participation that determine if an Environmental Impact Statement (EIS) is needed for a particular project or action. If an EA determines an EIS is not needed, the EA becomes the document allowing agency compliance with NEPA requirements.

Environmental Impact Statement (EIS): EISs were authorized by the National Environmental Policy Act (NEPA) of 1969. Prepared with public participation, they assist decision makers by providing information, analysis and an array of action alternatives, allowing managers to see the probable effects of decisions on the environment. Generally, EISs are written for large-scale actions or geographical areas.

Equilibrium Moisture Content: Moisture content that a fuel particle will attain if exposed for an infinite period in an environment of specified constant temperature and humidity. When a fuel particle reaches equilibrium moisture content, net exchange of moisture between it and the environment is zero.

Escape Route: A preplanned and understood route firefighters take to move to a safety zone or other low-risk area, such as an already burned area, previously constructed safety area, a meadow that won't burn, or natural rocky area that is large enough to take refuge without being burned. When escape routes deviate from a defined physical path, they should be clearly marked (flagged).

Escaped Fire: A fire that has exceeded or is expected to exceed initial attack capabilities or prescription.

Extended Attack Incident: A wildland fire that has not been contained or controlled by initial attack forces and for which more firefighting resources are arriving, en route, or being ordered by the initial attack Incident Commander.

Extreme Fire Behavior: "Extreme" implies a level of fire behavior characteristics that ordinarily precludes methods of direct control action. One or more of the following is usually involved: high rate of spread, prolific crowning and/or spotting, presence of firewhirls or strong convection column. Predictability is difficult because such fires often exercise some degree of influence on their environment and behave erratically, sometimes dangerously.

Field Observer: Person responsible to the Situation Unit Leader for collecting and reporting information about an incident obtained from personal observations and interviews.

Fine Fuels: Fast-drying fuels, generally with a comparatively high surface area to volume ratio, which are less than 1/4-inch in diameter and have a time lag of one hour or less. These fuels readily ignite and are rapidly consumed when dry.

Fingers of a Fire: The long narrow extensions of a fire projecting from the main body.

Fire Behavior: The manner in which a fire reacts to the influences of fuel, weather and topography.

Fire Behavior Forecast: Prediction of probable fire behavior usually prepared by a Fire Behavior Specialist, in support of fire suppression or prescribed burning operations.

Fire Behavior Specialist: A person responsible to the Planning Section Chief for establishing a weather data collection system and for developing fire behavior predictions based on fire history, fuel, weather and topography.

Fire Break: A natural or constructed barrier used to stop or check fires that may occur, or to provide a control line from which to work.

Fire Cache: A supply of fire tools and equipment assembled in planned quantities or standard units at a strategic point for exclusive use in fire suppression.

Fire Crew: An organized group of firefighters under the leadership of a crew leader or other designated official.

Fire Front: The part of a fire within which continuous flaming combustion is taking place. Unless otherwise specified, the fire front is assumed to be the leading edge of the fire perimeter. In ground fires, the fire front may be mainly smoldering combustion.

Fire Intensity: A general term relating to the heat energy released by a fire.

Fireline: A linear fire barrier that is scraped or dug to mineral soil.

Fire Management Plan (FMP): A strategic plan that defines a program to manage wildland and prescribed fires and documents the Fire Management Program in the approved land use plan. The plan is supplemented by operational plans such as preparedness plans, preplanned dispatch plans, prescribed fire plans, and prevention plans.

Fire Perimeter: The entire outer edge; or boundary of a fire.

Fire Season: 1) Period(s) of the year during which wildland fires are likely to occur, spread, and affect resource values sufficient to warrant organized fire management activities. 2) A legally enacted time during which burning activities are regulated by state or local authority.

Fire Shelter: An aluminized tent offering protection by means of reflecting radiant heat and providing a volume of breathable air in a fire entrapment. Fire shelters should only be used in life-threatening situations, as a last resort.

Fire Shelter Deployment: The removing of a fire shelter from its case and using it as protection against fire.

Fire Storm: Violent convection caused by a large continuous area of intense fire. Often characterized by destructively violent surface indrafts, near and beyond the perimeter, and sometimes by tornado-like whirls.

Fire Triangle: Instructional aid in which the sides of a triangle are used to represent the three factors (oxygen, heat, fuel) necessary for combustion and flame production; the removal of any of the three factors causes flame production to cease.

Fire Use Module (Prescribed Fire Module): A team of skilled and mobile personnel dedicated primarily to prescribed fire management. These are national and interagency resources, available throughout the prescribed fire season, that can ignite, hold and monitor prescribed fires.

Fire Weather: Weather conditions that influence fire ignition, behavior and suppression.

Fire Weather Watch: A term used by fire weather forecasters to notify using agencies, usually 12 to 72 hours ahead of the event, that current and developing meteorological conditions may evolve into dangerous fire weather.

Fire Whirl: Spinning vortex column of ascending hot air and gases rising from a fire and carrying aloft smoke, debris, and flame. Fire whirls range in size from less than one foot to more than 500 feet in diameter. Large fire whirls have the intensity of a small tornado.

Firefighting Resources: All people and major items of equipment that can or potentially can be assigned to fires.

Flame Height: The average maximum vertical extension of flames at the leading edge of the fire front. Occasional flashes that rise above the general level of flames are not considered. This distance is less than the flame length if flames are tilted due to wind or slope.

Flame Length: The distance between the flame tip and the midpoint of the flame depth at the base of the flame (generally the ground surface). It is an indicator of fire intensity.

Flaming Front: The zone of a moving fire where the combustion is primarily flaming. Behind this flaming zone combustion is primarily glowing. Light fuels typically have a shallow flaming front, whereas heavy fuels have a deeper front. It is also called the fire front.

Flanks of a Fire: The parts of a fire's perimeter that are roughly parallel to the main direction of spread.

Flare-up: Any sudden acceleration of fire spread or intensification of a fire. Unlike a blow-up, a flare-up lasts a relatively short time and does not radically change control plans.

Flash Fuels: Fuels such as grass, leaves, draped pine needles, fern, tree moss and some kinds of slash, that ignite readily and are consumed rapidly when dry. They are also called fine fuels.

Fuel: Combustible material. Fuel includes, vegetation, such as grass, leaves, ground litter, plants, shrubs and trees which feed a fire. (See Surface Fuels.)

Fuel Bed: An array of fuels usually constructed with specific loading, depth and particle size to meet experimental requirements; also, commonly used to describe the fuel composition in natural settings.

Fuel Loading: The amount of fuel present expressed quantitatively in terms of weight of fuel per unit area.

Fuel Model: Simulated fuel complex (or combination of vegetation types) for which all fuel descriptors required for the solution of a mathematical rate of spread model have been specified.

Fuel Moisture (Fuel Moisture Content): The quantity of moisture in fuel expressed as a percentage of the weight when thoroughly dried.

Fuel Reduction: Manipulation, including combustion, or removal of fuels to reduce the likelihood of ignition and/or to lessen potential damage and resistance to control.

Fuel Type: An identifiable association of fuel elements of a distinctive plant species, form, size, arrangement, or other characteristics that will cause a predictable rate of fire spread or difficulty of control under specified weather conditions.

Fusee: A colored flare designed as a railway warning device and widely used to ignite suppression and prescription fires.

General Staff: The group of incident management personnel reporting to the incident commander. They may each have a deputy. Staff consists of operations section chief, planning section chief, logistics section chief, and finance/administration section chief.

Geographic Area: A political boundary designated by the wildland fire protection agencies, where these agencies work together in the coordination.

Ground Fuel: All combustible materials below the surface litter, including duff, tree or shrub roots, punchy wood, peat, and sawdust, which will normally support a glowing combustion without flame.

Haines Index: An atmospheric index used to indicate the potential for wildfire growth by measuring the stability and dryness of the air over a fire.

Hand Line: A fireline built with hand tools.

Hazard Reduction: Any treatment of a hazard that reduces the threat of ignition and fire intensity or rate of spread.

Head of a Fire: The side of the fire having the fastest rate of spread.

Heavy Fuels: Fuels of large diameter such as snags, logs, or large limb wood, which ignite and are consumed more slowly than flash fuels.

Helibase: The main location within the general incident area for parking, fueling, maintaining, and loading helicopters.

Helispot: A temporary landing spot for helicopters.

Helitack: The use of helicopters to transport crews, equipment, and fire retardants or suppressants to the fireline during the initial stages of a fire.

Helitack Crew: A group of firefighters trained in the technical and logistical use of helicopters for fire suppression.

Holding Actions: Planned actions required to achieve wildland prescribed fire management objectives. These actions have specific implementation timeframes for fire use actions but can have less sensitive implementation demands for suppression actions.

Holding Resources: Firefighting personnel and equipment assigned to do all required fire suppression work following fireline construction but generally not including extensive mop-up.

Hose Lay: Arrangement of connected lengths of fire hose and accessories on the ground, beginning at the first pumping unit and ending at the point of water delivery.

Hotshot Crew: A highly trained fire crew used mainly to build fireline by hand.

Hotspot: A particularly active part of a fire.

Hot spotting: Reducing or stopping the spread of fire at points of particularly rapid rate of spread or special threat, generally the first step in prompt control, with emphasis on first priorities.

Incident: A human-caused or natural occurrence, such as wildland fire, that requires emergency service action to prevent or reduce the loss of life or damage to property or natural resources.

Incident Action Plan (IAP): Contains objectives reflecting the overall incident strategy and specific tactical actions and supporting information for the next operational period. The plan may be oral or written. When written, the plan may have a number of attachments, including: incident objectives, organization assignment list, division assignment, incident radio communication plan, medical plan, traffic plan, safety plan, and incident map.

Incident Command Post (ICP): Location at which primary command functions are executed. The ICP may be co-located with the incident base or other incident facilities.

Incident Command System (ICS): The combination of facilities, equipment, personnel, procedure and communications operating within a common organizational structure, with responsibility for the management of assigned resources to effectively accomplish stated objectives pertaining to an incident.

Incident Commander: Individual responsible for the management of all incident operations at the incident site.

Incident Management Team: The Incident Commander and appropriate general or command staff personnel assigned to manage an incident.

Incident Objectives: Statements of guidance and direction necessary for selection of appropriate strategies, and the tactical direction of resources. Incident objectives are based on realistic expectations of what can be accomplished when all allocated resources have been effectively deployed.

Infrared Detection: The use of heat sensing equipment, known as Infrared Scanners, for detection of heat sources that are not visually detectable by the normal surveillance methods of either ground or air patrols.

Initial Attack: The actions taken by the first resources to arrive at a wildfire to protect lives and property, and prevent further extension of the fire.

Jump Spot: Selected landing area for smokejumpers.

Keech-Byram Drought Index (KBDI): Commonly-used drought index adapted for fire management applications, with a numerical range from 0 (no moisture deficiency) to 800 (maximum drought).

Knock Down: To reduce the flame or heat on the more-vigorously burning parts of a fire edge.

Ladder Fuels: Fuels which provide vertical continuity between strata, thereby allowing fire to carry from surface fuels into the crowns of trees or shrubs with relative ease. They help initiate and assure the continuation of crowning.

Large Fire: 1) For statistical purposes, a fire burning more than a specified area of land e.g., 100 acres in timber. 2) A fire burning with a size and intensity such that its behavior is determined by interaction between its own convection column and weather conditions above the surface.

Lead Plane: Aircraft with pilot used to make dry runs over the target area to check wind and smoke conditions and topography and to lead air tankers to targets and supervise their drops.

Light (Fine) Fuels: Fast-drying fuels, generally with a comparatively high surface area to volume ratio, which is less than 1/4-inch in diameter and has a time lag of one hour or less. These fuels readily ignite and are rapidly consumed by fire when dry.

Lightning Activity Level (LAL): A number, on a scale of 1 to 6 that reflects frequency and character of cloud-to-ground lightning. The scale is exponential, based on powers of 2 (i.e., LAL 3 indicates twice the lightning of LAL 2).

Line Scout: A firefighter who determines the location of a fireline.

Litter: Top layer of the forest, scrub land, or grassland floor, directly above the fermentation layer, composed of loose debris of dead sticks, branches, twigs, and recently fallen leaves or needles, little altered in structure by decomposition.

Live Fuels: Living plants, such as trees, grasses, and shrubs, in which the seasonal moisture content cycle is controlled largely by internal physiological mechanisms, rather than by external weather influences.

Micro-Remote Environmental Monitoring System (Micro-REMS): Mobile weather monitoring stations that are used to determine weather conditions on and close to the incident.

Mineral Soil: Soil layers below the predominantly organic horizons or soil with little combustible material.

Mobilization: The process and procedures used by all organizations, federal, state and local for activating, assembling, and transporting all resources that have been requested to respond to or support an incident.

Modular Airborne Firefighting System (MAFFS): A manufactured unit consisting of five interconnecting tanks, a control pallet, and a nozzle pallet, with a capacity of 3,000 gallons, designed to be rapidly mounted inside an unmodified C-130 (Hercules) cargo aircraft for use in dropping retardant on wildland fires.

Mop-up: To make a fire safe or reduce residual smoke after the fire has been controlled by extinguishing or removing burning material along or near the control line, felling snags, or moving logs so they won't roll downhill.

Multi-Agency Coordination (MAC): A generalized term which describes the functions and activities of representatives of involved agencies and/or jurisdictions who come together to make decisions regarding the prioritizing of incidents, and the sharing and use of critical resources. The MAC is not a part of the on-scene ICS and is not involved in developing incident strategy or tactics.

Mutual Aid Agreement: Written agreement between agencies and/or jurisdictions in which they agree to assist one another upon request, by furnishing personnel and equipment.

National Environmental Policy Act (NEPA): NEPA is the basic national law for protection of the environment, passed by Congress in 1969. It sets policy and procedures for environmental protection. It authorizes Environmental Impact Statements and Environmental Assessments to be used as analytical tools to help federal managers make decisions.

National Fire Danger Rating System (NFDRS): A uniform fire danger rating system that focuses on the environmental factors that control the moisture content of fuels.

National Wildfire Coordinating Group: A group formed under the direction of the Secretaries of Agriculture and the Interior and comprised of representatives of the USDA Forest Service, Bureau of Land Management, Bureau of Indian Affairs, National Park Service, U.S. Fish and Wildlife Service and Association of State Foresters. The group's purpose is to facilitate coordination and effectiveness of wildland fire activities and provide a forum to discuss, recommend action, or resolve issues and problems of substantive nature. NWCG is the certifying body for all courses in the National Fire Curriculum.

Nomex ®: Trade name for a fire resistant synthetic material used in the manufacturing of flight suits and pants and shirts used by firefighters

Normal Fire Season: 1) A season when weather, fire danger, and number and distribution of fires are about average. 2) Period of the year that normally comprises the fire season.

Operations Branch Director: Person under the direction of the operations section chief who is responsible for implementing that portion of the incident action plan appropriate to the branch.

Operational Period: The period of time scheduled for execution of a given set of tactical actions as specified in the Incident Action Plan. Operational periods can be of various lengths, although usually not more than 24 hours.

Overhead: People assigned to supervisory positions, including incident commanders, command staff, general staff, directors, supervisors, and unit leaders.

Pack Test: Used to determine the aerobic capacity of fire suppression and support personnel and assign physical fitness scores. The test consists of walking a specified distance, with or without a weighted pack, in a predetermined period of time, with altitude corrections.

Paracargo: Anything dropped, or intended for dropping, from an aircraft by parachute, by other retarding devices, or by free fall.

Peak Fire Season: That period of the fire season during which fires are expected to ignite most readily, to burn with greater than average intensity, and to create damages at an unacceptable level.

Personnel Protective Equipment (PPE): All firefighting personnel must be equipped with proper equipment and clothing in order to mitigate the risk of injury from, or exposure to, hazardous conditions encountered while working. PPE includes, but is not limited to: 8-inch high-laced leather boots with lug soles, fire shelter, hard hat with chin strap, goggles, ear plugs, aramid shirts and trousers, leather gloves and individual first aid kits.

Preparedness: Condition or degree of being ready to cope with a potential fire situation

Prescribed Fire: Any fire ignited by management actions under certain, predetermined conditions to meet specific objectives related to hazardous fuels or habitat improvement. A written, approved prescribed fire plan must exist, and NEPA requirements must be met, prior to ignition.

Prescribed Fire Plan (Burn Plan): This document provides the prescribed fire burn boss information needed to implement an individual prescribed fire project.

Prescription: Measurable criteria that define conditions under which a prescribed fire may be ignited, guide selection of appropriate management responses, and indicate other required actions. Prescription criteria may include safety, economic, public health, environmental, geographic, administrative, social, or legal considerations.

Prevention: Activities directed at reducing the incidence of fires, including public education, law enforcement, personal contact, and reduction of fuel hazards.

Project Fire: A fire of such size or complexity that a large organization and prolonged activity is required to suppress it.

Pulaski: A combination chopping and trenching tool, which combines a single-bitted axe-blade with a narrow adze-like trenching blade fitted to a straight handle. It is useful for grubbing or trenching in duff and matted roots. It is well-balanced for chopping.

Radiant Burn: A burn received from a radiant heat source.

Radiant Heat Flux: The amount of heat flowing through a given area in a given time, usually expressed as calories/square centimeter/second.

Rappelling: Technique of landing specifically trained firefighters from hovering helicopters; involves sliding down ropes with the aid of friction-producing devices.

Rate of Spread: The relative activity of a fire in extending its horizontal dimensions. It is expressed as a rate of increase of the total perimeter of the fire, as rate of forward spread of the fire front, or as rate of increase in area, depending on the intended use of the information. Usually it is expressed in chains or acres per hour for a specific period in the fire's history.

Reburn: The burning of an area that has been previously burned but that contains flammable fuel that ignites when burning conditions are more favorable.

Red Card: Fire qualification card issued to fire rated persons showing their training needs and their qualifications to fill specified fire suppression and support positions in a large fire suppression or incident organization.

Red Flag Warning: Term used by fire weather forecasters to alert forecast users to an ongoing or imminent critical fire weather pattern.

Rehabilitation: The activities necessary to repair damage or disturbance caused by wildland fires or the fire suppression activity.

Relative Humidity (RH): The ratio of the amount of moisture in the air, to the maximum amount of moisture that air would contain if it were saturated.

Remote Automatic Weather Station (RAWS): An apparatus that will automatically acquire, process, and store local weather data for later transmission to the GOES Satellite, from which the data is re-transmitted to an earth-receiving station for use in the National Fire Danger Rating System.

Resources: 1) Personnel, equipment, services and supplies available, or potentially available, for assignment to incidents. 2) The natural resources of an area, such as timber, grass, watershed values, recreation values, and wildlife habitat.

Resource Management Plan (RMP): A document prepared by field office staff with public participation and approved by field office managers that provides general guidance and direction for land management activities at a field office. The RMP identifies the need for fire in a particular area and for a specific benefit.

Resource Order: An order placed for firefighting or support resources.

Retardant: A substance or chemical agent which reduces the flammability of combustibles.

Run (of a fire): The rapid advance of the head of a fire with a marked change in fireline intensity and rate of spread from that noted before and after the advance.

Running fire: A rapidly spreading surface fire; usually with a well-defined head.

Safety Zone: An area cleared of flammable materials used for escape in the event the line is outflanked or in case a spot fire causes fuels outside the control line to render the line unsafe. In firing operations, crews progress so as to maintain a safety zone close at hand allowing the fuels inside the control line to be consumed before going ahead. Safety zones may also be constructed as integral parts of fuel breaks; they are greatly enlarged areas which can be used with relative safety by firefighters and their equipment in the event of a blow-up in the vicinity.

Scratch Line: An unfinished preliminary fireline hastily established or built as an emergency measure to check the spread of fire

Severity Funding: Funds provided to increase wildland fire suppression response capability necessitated by abnormal weather patterns, extended drought, or other events causing abnormal increase in the fire potential and/or danger.

Single Resource: An individual, a piece of equipment and its personnel complement, or a crew or team of individuals with an identified work supervisor that can be used on an incident.

Size-up: To evaluate a fire to determine a course of action for fire suppression.

Slash: Debris left after logging, pruning, thinning or brush cutting; includes logs, chips, bark, branches, stumps and broken underscore trees or brush.

Sling Load: Any cargo carried beneath a helicopter and attached by a lead line and swivel.

Slop-over: A fire edge that crosses a control line or natural barrier intended to contain the fire.

Smokejumpers: A firefighter who travels to fires by aircraft and parachute.

Smoke Management: Application of fire intensities and meteorological processes to minimize degradation of air quality during prescribed fires.

Smoldering Fire: A fire burning without flame and barely spreading.

Snag: A standing dead tree or part of a dead tree from which at least the smaller branches have fallen.

Spark Arrester: A device installed in a chimney, flue, or exhaust pipe to stop the emission of sparks and burning fragments.

Spot Fire: A fire ignited outside the perimeter of the main fire by flying sparks or embers.

Spot Weather Forecast: A special forecast issued to fit the time, topography, and weather of each specific fire. These forecasts are issued upon request of the user agency and are more detailed, timely, and specific than zone forecasts.

Spotter: In smoke jumping, the person responsible for selecting the drop targets and supervising all aspects of dropping smokejumpers.

Spotting: A fire producing sparks or embers that are carried by the wind and start new fires beyond the zone of direct ignition by the main fire.

Staging Area: Locations set up at an incident where resources can be placed while awaiting a tactical assignment on a three-minute available basis. Staging areas are managed by the operations section.

Strategy: The science and art of command as applied to the overall planning and conduct of an incident.

Strike Team: Specified combinations of the same kind and type of resources, with common communications and a leader.

Strike Team Leader: Person responsible to a division/group supervisor for performing tactical assignments given to the strike team.

Structure Fire: Fire originating in, and burning any or all parts of buildings, shelters, or other structures.

Suppressant: An agent, such as water or foam, used to extinguish the flaming and glowing phases of combustion when directly applied to burning fuels.

Suppression: All the work of extinguishing or containing a fire, beginning with its discovery.

Surface Fuels: Loose surface litter on the soil surface, normally consisting of fallen leaves or needles, twigs, bark, cones, and small branches that have not yet decayed enough to lose their identity; also grasses, Forb, low and medium shrubs, tree seedlings, heavier branchiopod, downed logs, and stumps interspersed with or partially replacing the litter.

Scamper: (1) A worker who assists Faller and/or sawyers by clearing away brush, limbs and small trees. Carries fuel, oil and tools and watches for dangerous situations. (2) A worker on a dozer crew, who pulls winch line, helps maintain equipment, etc., to speed suppression work on a fire.

Tactics: Deploying and directing resources on an incident to accomplish the objectives designated by strategy.

Temporary Flight Restrictions (TFR): A restriction requested by an agency and put into effect by the Federal Aviation Administration in the vicinity of an incident which restricts the operation of nonessential aircraft in the airspace around that incident.

Terra Torch ®: Device for throwing a stream of flaming liquid, used to facilitate rapid ignition during burn out operations on a wildland fire or during a prescribed fire.

Test Fire: A small fire ignited within the planned burn unit to determine the characteristic of the prescribed fire, such as fire behavior, detection performance and control measures.

Time lag: Time needed under specified conditions for a fuel particle to lose about 63 percent of the difference between its initial moisture content and its equilibrium moisture content. If conditions remain unchanged, a fuel will reach 95 percent of its equilibrium moisture content after four time lag periods.

Tolling of the Bells: Before the telephone was commonplace, fire departments would use the telegraph to communicate. When a firefighter fell in the line of duty, the fire alarm office would tap out a signal. This was done for the purpose of notification, and as a sign of honor and respect for all firefighters who had made the ultimate sacrifice to serve their communities. This would be tapped out as five measured dashes, then a pause, then five measured dashes, then a pause, then five more measured dashes. Such symbolism has been a time-honored tradition, and is repeated at each service of a fallen firefighter.

Torching: The ignition and flare-up of a tree or a small group of trees, usually from the bottom up.

Two-way Radio: Radio equipment with transmitters in mobile units on the same frequency as the base station, permitting conversation in two directions using the same frequency in turn.

Type: The capability of a firefighting resource in comparison to another type. Type 1 usually means a greater capability due to power, size, or capacity.

Uncontrolled Fire: Any fire which threatens to destroy life, property, or natural resources.

Under fire: A fire that consumes surface fuels but not trees or shrubs.

Vectors: Directions of fire spread as related to rate of spread calculations (in degrees from up slope).

Volunteer Fire Department (VFD): A fire department of which some or all members are unpaid.

Water Tender: A ground vehicle that is capable of transporting water.

Weather Information and Management System (WIMS): An interactive computer system designed to accommodate the weather information needs of all federal and state natural resource management agencies. WIMS provides timely access to weather forecasts, current and historical weather data, the National Fire Danger Rating System (NFDRS), and the National Interagency Fire Management Integrated Database (NIFMID).

Wet Line: A line of water chemical retardant, sprayed along the ground that serves as a control line from which to ignite or stop a low-intensity fire.

Wildland Fire: Any non-structure fire, other than prescribed fire, that occurs in the wild.

Wildland Fire Implementation Plan (WFIP): A progressively developed assessment and operational management plan that documents the analysis and selection of strategies and describes the appropriate management response for a wildland fire being managed for resource benefits.

Wildland Fire Situation Analysis (WFSA): A decision-making process that evaluates alternative suppression strategies against selected environmental, social, political, and economic criteria. It provides a record of decisions.

Wildland Urban Interface: The line, area or zone where structures and other human development meet or intermingle with undeveloped wildland or vegetative fuels.

Wind Vectors: Wind directions used to calculate fire behavior.

Appendix 2: Southern Region of the National Weather Service Fire Weather Program Leaders and IMETs.

Southern Region Fire Weather Meteorologist: Paul Witsaman
819 Taylor Street, Room 10A26
Fort Worth, TX 76102
Phone: 817-978-1100 x116

1. Albuquerque, NM
Fire Weather Program Leader: Brent Wachter (IMET)
Phone: 505-244-9148

2. Amarillo, TX
Fire Weather Program Leader: Ken Schneider
Phone: 806-335-9022

3. Atlanta, GA
Fire Weather Program Leader: Brian Lynn (IMET)
Phone: 770-486-1133x241

4. Austin/San Antonio, TX
Fire Weather Program Leader: Monte Oaks
Phone: 830-629-0205

5. Birmingham, AL
Fire Weather Program Leader: Mark Linhares
Phone: 256-621-5645

6. Brownsville, TX
Fire Weather Program Leader: Jason Straub
Phone: 956-504-3084

7. Corpus Christi, TX
Fire Weather Program Leader: Jason Runyen
Phone: 361-289-0725

8. El Paso, TX
Fire Weather Program Leader: Tom Bird (IMET)
Phone: 575-589-3972

9. Fort Worth, TX
Fire Weather Program Leader: Joe Harris
Phone: 817-831-1595



10. Huntsville, AL
Fire Weather Program Leader: Steve Shumway
Phone: 256-890-8505

11. Houston/Galveston, TX
Fire Weather Program Leader: Kent Prochazka
Phone: 281-534-3876

12. Jackson, MS
Fire Weather Program Leader: Eric Carpenter
Phone: 601-939-2786

13. Jacksonville, FL
Fire Weather Program Leader: Marie Trabert
Phone: 904-741-5186

14. Key West, FL
Fire Weather Program Leader: Alan Albanese
Phone: 305-295-1316

15. Knoxville/Tri-Cities, TN
Fire Weather Program Leader: David Gaffen
Phone: 423-586-8400

16. Lake Charles, LA
Fire Weather Program Leader: Kent Kuyper
Phone: 337-477-3422

17. Little Rock, AR
Fire Weather Program Leader: Joe Goudsward (IMET)
Phone: 501-834-3955

18. Lubbock, TX
Fire Weather Program Leader: Ron McQueen
Phone: 806-745-3980

19. Melbourne, FL
Fire Weather Program Leader: John Pendergrast
Phone: 321-259-7618

20. Memphis, TN
Fire Weather Program Leader: John Sirmon
Phone: 901-544-0357

21. Miami, FL
Fire Weather Program Leader: Vacant
Phone: 305-229-4523

22. Midland/Odessa, TX

Fire Weather Program Leader: Greg Murdoch (IMET)

Phone: 915-563-6217

23. Mobile, AL

Fire Weather Program Leader: John Purdy

Phone: 251-633-5456

24. Nashville, TN

Fire Weather Program Leader: John Cohen

Phone: 615-754-8502

25. New Orleans, LA

Fire Weather Program Leader: Tim Destri

Phone: 985-649-0899

26. Oklahoma City/Norman, OK

Fire Weather Program Leader: Scott Curl

Phone: 405-325-3632

27. San Angelo, TX

Fire Weather Program Leader: Seth Nagle

Phone: 325-949-0715

28. San Juan, PR

Fire Weather Program Leader: Luis Rosa

Phone: 787-253-4586

29. Shreveport, LA

Fire Weather Program Leader: Bill Adams

Phone: 318-636-7345

30. Tallahassee, FL

Fire Weather Program Leader: Tim Barry

Phone: 850-942-8835

31. Tampa Bay, FL

Fire Weather Program Leader: John Jelsema


Phone: 813-641-2512

32. Tulsa, OK

Fire Weather Program Leader: Craig Sullivan

Phone: 918-832-4116

Appendix 3: Fire Weather Areas of Responsibility

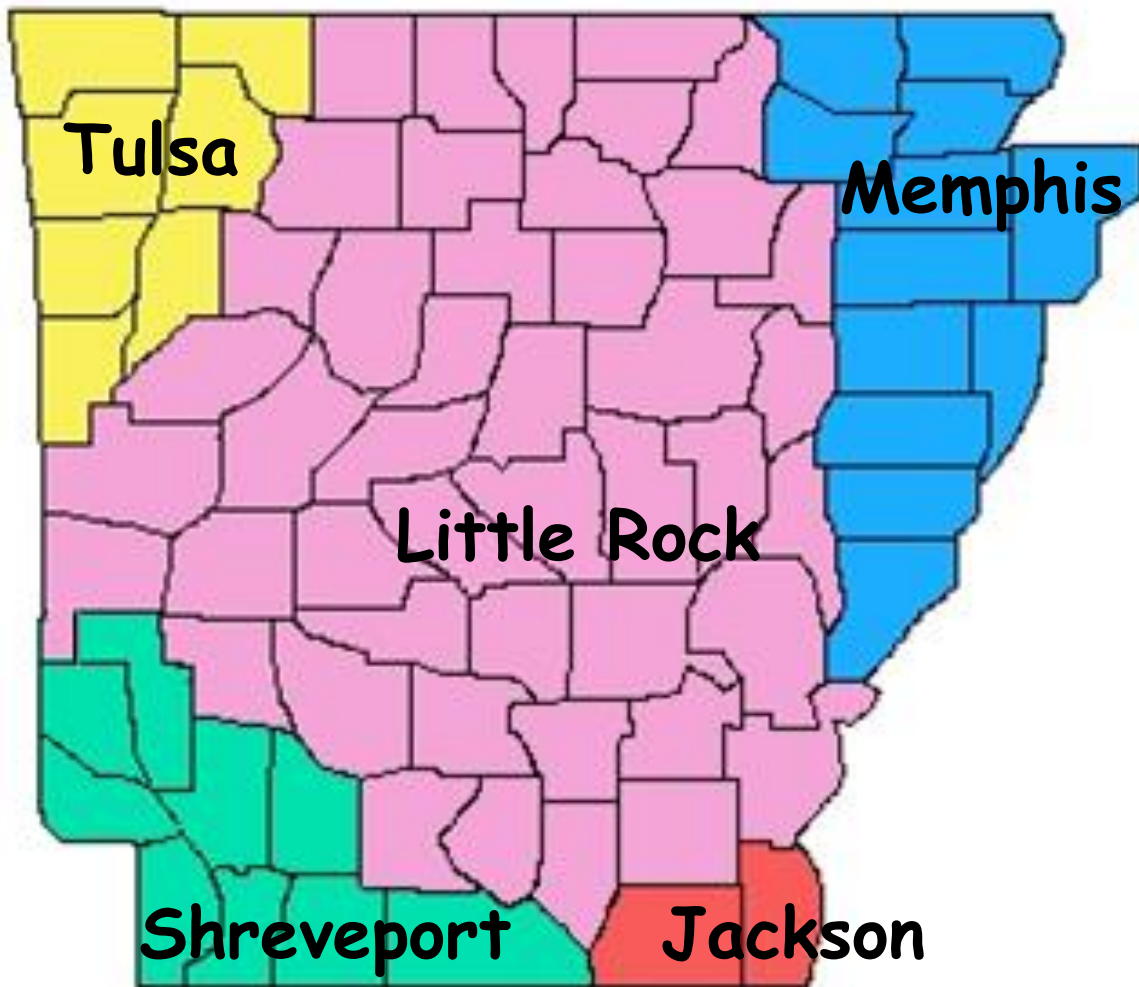

The Little Rock Fire weather forecast is no longer five static zones which were predetermined solely by geographical borders. The Little Rock fire weather forecaster now uses the flex zone concept where zones are grouped together based on the expected weather conditions. The actual zone, or county, groupings will likely change daily.

Appendix 4: National Fire Plan

NATIONAL AGREEMENT FOR METEOROLOGICAL SERVICES IN SUPPORT OF AGENCIES WITH LAND MANAGEMENT AND FIRE PROTECTION RESPONSIBILITIES

I. Introduction

This National Agreement is between the National Weather Service (NWS) and agencies with land management and fire management responsibilities signatory to this agreement. They are referred to in this agreement as “NWS” and “USER AGENCIES,” respectively. The User Agencies are responsible for the maintenance, improvements, and protection of the wildlands, owned or held in trust by the United States. Accurate and timely weather information is required to manage effectively and efficiently this valuable national resource. The NWS has the Expertise, organization, and legal charter to satisfy this need nationally. It is with this knowledge that this agreement is entered into. Its purpose is to combine resources so as to best serve the needs of the public and to fulfill the obligations of the respective agencies.

II. Authority

This agreement is authorized under the Economy Act (31 U.S.C. 686; 15 U.S.C. 313; 49 U.S.C. 1463) and the Cooperative Forestry Assistance Act of 1978 (16 U.S.C. 2101), etc.

III. Objectives

The objectives of this Agreement are to identify meteorological services to be provided, establish the interagency relationships, and define financial and other obligations of the NWS and User Agencies.

IV. Responsibilities

A. National Weather Service

Basic Meteorological services will be provided during normal working hours in accordance with Operating Plans for designated

NWS offices to the extent of NWS fire weather resources. NWS regional headquarters will identify to the User Agency headquarters a list of the designated fire weather offices on an annual basis. These services will be made available without cost and may include:

Routine daily fire weather forecasts
Outlooks and discussions

Weather observations
Red flag forecasts
Spot forecasts
Prescribed burn forecasts
Smoke management forecasts and information
Consultation and technical advice
Amendments / updates

Fire Weather Training -

The NWS recognizes the need for training in fire weather meteorology for NWS forecasters. To the extent of available resources, the NWS will meet this need.

Special meteorological services -

These services will be provided by designated NWS offices on a reimbursable basis as stated in Section IV B.

Weather observer training

Weather observation station visitations

Participation in User Agency training activities

Course development carried out at User Agency facilities

Classroom training

On-site meteorological services

Other special services

B. User Agencies -

The following services and resources will be provided by User Agencies:

Fire-management computer systems- Where existing fire management computer systems are locally available, access to the system will be provided.

Fire weather observations- Provide daily surface weather observations and enter data into fire management computer systems.

Provide all equipment, equipment maintenance, and inspection of weather observing sites.

Meet all travel and per diem costs associated with User Agencies' requests for visits of NWS personnel to weather-observing sites

Provide for collection of remote automatic weather systems data and entry into the fire management computer system.

Provide observations for site-specific and other special forecasts.

On-site meteorological support - Meet costs directly associated with on-site meteorological support by NWS personnel. This includes costs incurred by the backup NWS office.

Provide logistical and weather observation support to NWS personnel at on-site operations.

Provide access to telecommunication services where available.

Meet per diem and travel costs for NWS personnel participating in the conduct of User Agency training.

Provide technical assistance, instruction, and supporting material for NWS sponsored training sessions.

Other special services- User Agencies will provide logistics support and meet all overtime, travel, and per diem costs of NWS personnel associated with the provision of all other special services.

C. Joint Responsibilities -

NWS and User Agencies shall prepare an annual Operating Plan for individual fire weather office areas of responsibility. This plan will identify the basic weather services covered under Section IV.

V. Procedures for requesting services

Procedures for ordering services will be specified in Operating Plans for each NWS fire weather office.

VI. Billing Procedures

Costs to be recovered from User Agencies will be calculated on the basis of expense reports submitted to the NWS regional headquarters by field personnel. Copies of expense reports will be forwarded to appropriate User Agencies by NWS regional headquarters. This procedure will enable agencies to accurately determine costs to be reimbursed during a given fiscal year. Billing of User Agencies will be accomplished by NWS regional submission of appropriate expense reports to the NOAA Reimbursable Division. Bills will include a statement of service rendered, dates it was provided, and location where provided. All questions relating to billing procedures, charges, current costs, and individual expense reports should be directed to the appropriate NWS regional contact or the NWS Technical Monitor.

VII. Amendments

Upon written notice, the terms of this Agreement are subject to amendment at any time by mutual agreement of the parties. The signatory agencies agree to consider expansion of this Agreement to cover areas of mutual concern, e.g., changing technology and improved procedures, as opportunities for such cooperation become available.

VIII. Terms of National Agreement

1. The terms of this Agreement shall become effective upon execution by NWS and any or all User Agencies and shall remain in effect until such times as the Agreement is terminated by mutual agreement. Any agency may withdraw at any time by ninety (90) days written notice to all parties.

2. This Agreement does not constitute a financial obligation for any party in excess of appropriations authorized by law and administratively allocated for the purposes intended.

IX. Technical Monitor For NWS

Fire Weather Program Manager, W/OM12
NOAA/National Weather Service
1325 East-West Highway
Silver Spring, MD 20910
Telephone: (301) 713-1677 ext. 131

Definitions

When the following terms are used in this Agreement or in an operating plan, such terms will have the meanings stated below.

1. Fire Weather Office Operating Plan

A procedural guide which describes the services provided within the area of a fire weather office's responsibility.

2. Basic Meteorological Services

Basic meteorological services are those state-of-the-science meteorological forecasts, warnings, observations, and statements produced in a designated NWS fire weather office during normal working hours.

3. Fire Weather Zone or District

A fire weather zone or district is the area of routine service responsibility as defined by the NWS. This area is usually defined by climatological factors, but may be modified somewhat to the administrative boundaries of the User Agencies.

4. Normal Working Hours

Normal working hours are defined in the Operating Plan, but usually cover 8-hour workdays, Monday through Friday, except during fire season when the normal hours cover 7 days a week

5. Prescribed Fire

Prescribed fire is a fire burning in wildland fuels according to a planned prescription and confined within planned boundaries for the purpose of achieving specific objectives of resource management. (Prescribed burning is the practice of prescribed fire use.)

6. Red Flag

Red flag is a program which highlights the onset of critical weather conditions conducive to extensive wildfire occurrences.

7. Special Meteorological Services

Meteorological services uniquely required by User Agencies which cannot be provided at a designated NWS fire weather office during normal working hours.

8. Spot Forecasts

Spot forecasts are site-specific weather forecasts. They are issued upon request of User Agencies for wildfire, prescribed burns, or special projects.

9. On-site

That special service which dedicates a fire weather forecaster to a wildfire, prescribed fire, or special project such that the fire weather forecaster is removed from providing basic services at his/her assigned weather office.

Appendix 5: Fire Links

National Weather Service Links:

National Weather Service - <http://www.nws.noaa.gov>
National Weather Service Fire Weather Program- <http://tgs5.nws.noaa.gov/om/fire.htm>
Southern Region Fire Weather –
<http://www.srh.noaa.gov/firewx.htm>
National Fire Weather Products –
<http://www.boi.noaa.gov/firewx.htm>
Storm Prediction Center - <http://www.spc.noaa.gov/fire/>
NWS Little Rock - <http://www.srh.noaa.gov/lzk/>
NWS Shreveport - <http://www.srh.noaa.gov/shv/>
NWS Tulsa - <http://www.srh.noaa.gov/tulsa/>
NWS Jackson - <http://www.srh.noaa.gov/jan/>
NWS Memphis - <http://www.srh.noaa.gov/meg/>


National and Regional Fire Weather Links:

National Interagency Fire Center - <http://www.nifc.gov/>
Southern Area Coordination Center - <http://www.r8web.com/sacc/>
USDA Forest Service Fire Site - <http://www.fs.fed.us/fire>
National Park Service Fire Site - <http://fire.nifc.nps.gov/fire/default.htm>
U.S. Fish & Wildlife Service Fire Site - <http://fire.r9.fws.gov/>
USDA Wildland Fire Assessment System - <http://www.fs.fed.us/land/wfas/welcome.htm>
National RAWS data server -
<http://www.boi.noaa.gov/FIREWX/Raws/TABLES/rawsText.htm>
RAWS Summaries - <http://raws.boi.noaa.gov/rawssum.html>

Additional Links:

Haines Index - <http://raws.boi.noaa.gov/rawssum.html>
Keetch-Byram Drought Index - <http://www.fs.fed.us/land/wfas/kbdi.gif>
Palmer Drought Index - http://nic.fb4.noaa.gov/products/analysis_monitoring/regional_monitoring/palmer.gif
8 to 14 day outlook –
<http://www.cpc.ncep.noaa.gov/products/predictions/814day/>
30 day outlooks - <http://www.cpc.ncep.noaa.gov/products/predictions/30day/>
90 day outlooks - <http://www.cpc.ncep.noaa.gov/products/predictions/90day/> Weather
Calculator - <http://www.srh.noaa.gov/lzk/html/metcalc.htm>
Fire Danger Class - http://www.fs.fed.us/land/wfas/fd_class.gif
Observed Relative Humidity - <http://www.fs.fed.us/land/wfas/rh.gif>
Observed Temperature - <http://www.fs.fed.us/land/wfas/temp.gif>
Observed Wind Speed - <http://www.fs.fed.us/land/wfas/ws.gif>

Appendix 6: Remote Automated Weather Stations and NFDRS Forecast Sites.

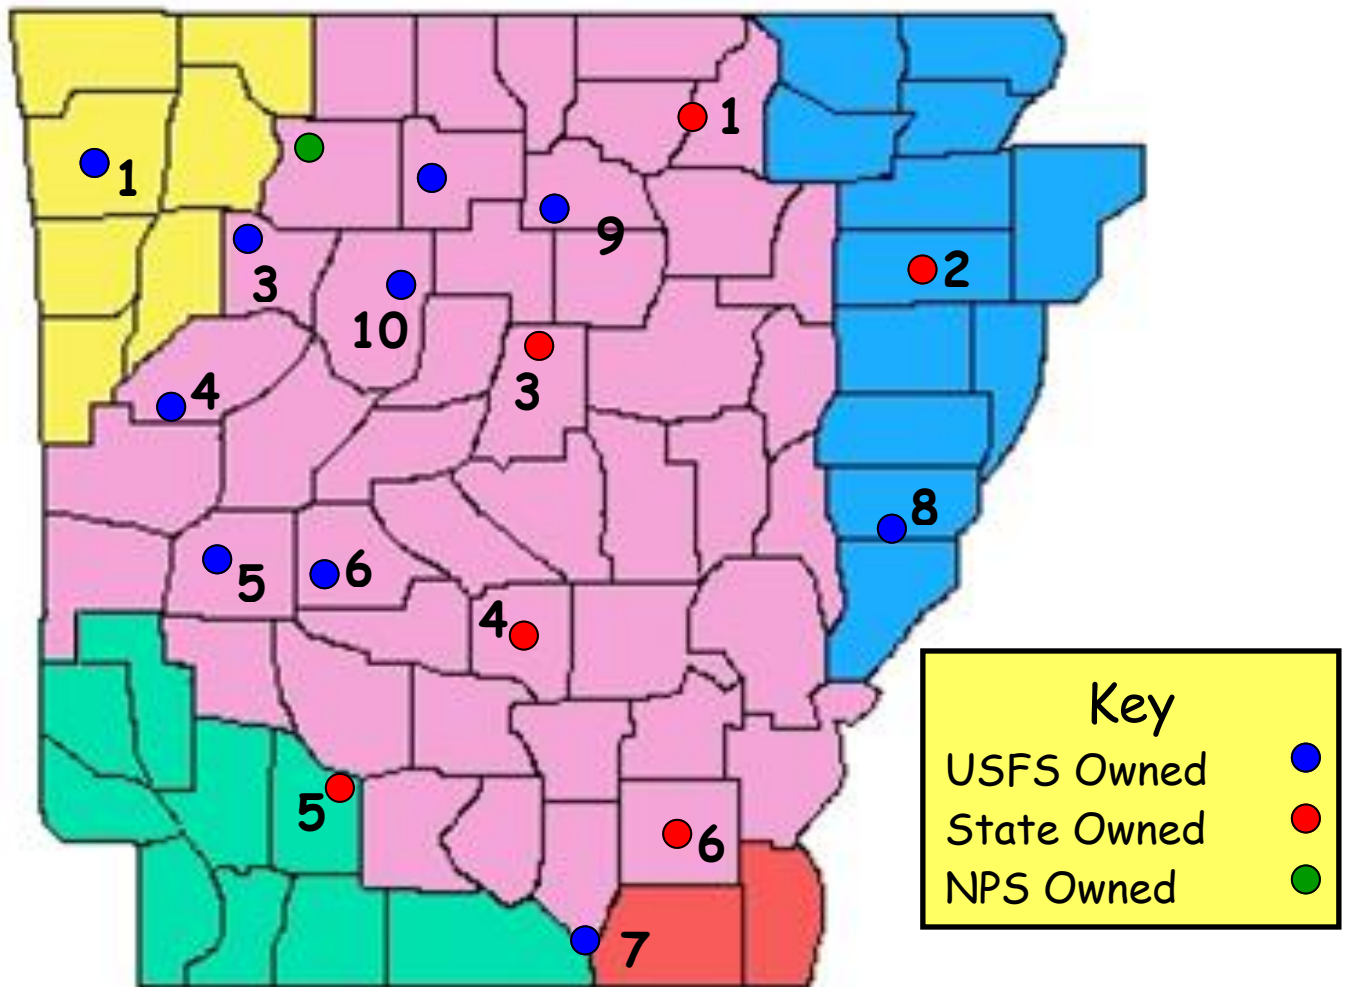

USFS Owned

Point 1	Strickler
Point 2	Silver Hill
Point 3	Devils Knob
Point 4	Booneville
Point 5	Oden
Point 6	Jessieville
Point 7	Felsenthal
Point 8	St. Francis
Point 9	Blanchard Springs
Point 10	Armstead Mountain ⁸⁴

State Owned

Evening Shade
Poinsett
Guy
Sheridan
Bluff City
Monticello

NPS Owned

Compton

Appendix 7: Contacts

Arkansas Oklahoma Interagency Coordination Center

110 Indiana Street
Hot Springs, Arkansas 71901
24 hr on call phone # 501-574-8758
AOICCDispatch@gmail.com
Phone: 501-321-5232
Fax: 501-627-0633
Center Manager: Scott Swendsen
Assistant Center Manager:
Dispatcher: Darrell Barlow
Dispatcher: Vacant

USFS Fire Management Team

Team Leader: Lance Elmore
Phone: 501-321-5284
Asst. Team leader: Vacant
Phone: 479-964-7219
Fire Management Officer, Ouachita & Ozark National Forests: Andy Dyer
Phone: 501-321-5217
Forest Aviation Officer: Johnny Lindsey
Phone: 479-964-7262
Fire Planner: Teresa Williamson
Phone: 479-964-7265

Southern Area Coordination Center – (SACC)

1200 Ashwood Parkway; Suite 230
Atlanta, GA 30338
Phone: 678-320-3000
Fax: 678-320-3036
Meteorologist: Denver Ingram
Phone: 678-320-3008
Meteorologist: Kevin Scasny
Phone: 678-320-3009

The Nature Conservancy

601 North University Ave
Little Rock, AR 72205
Phone: 501-663-6699, Fax: 501-663-8332
Fire Manager: Kyle Lapham
Phone: 501-614-5074
Fire Restoration Fire Manager: McRee Anderson
Phone: 479-973-9001, ext 227

State of Arkansas

Arkansas Forestry Commission

3821 West Roosevelt Road

Little Rock, AR, 72204

Phone: 501-296-1940, Fax: 501-296-1949

Fire Information Officer: Christina Barnes

Phone: 501-296-1937

State Forester: Joe Foxx

Phone: 501-296-2941

Deputy Forester: Larry Nance

Phone: 501-296-1942

State Fire Chief: Don McBride

Phone: 501-296-1870

Asst. Fire Chief: Bill Chaney

Phone: 501-296-1871

Arkansas Forestry Commission Dispatch Center

198 Airport Road

Malvern, AR 72104

Phone: 501-332-2000, Fax: 501-332-4447

Dispatcher: Sherry Russell

Phone: 501-332-2000

US Forest Service

Ozark – St Francis National Forest

605 West Main

Russellville, Arkansas 72801

Phone: 479-964-7200 ext. 7293, 7263, 7262

Fax: 479-964-7229

Forest Supervisor: Reggie Blackwell

Phone: 479-964-7202

Fire Team leader: Lance Elmore

Phone: 479-964-7219

Forest Aviation Officer: Johnny Lindsey

Phone: 479-964-7262

Fire Planner: Teresa Williamson

Phone: 479-964-7265

Big Piney Ranger District*Hector Office:*

12000 SR 27

Hector, Arkansas 72843

Phone: 479-284-3150

Fax: 479-284-2015

Fire Management Officer: Mark Morales

Assistant Fire Management Officer: Vacant

Jasper Office

Highway 7 North - POB 427

Jasper, Arkansas 72641

Phone: 870-446-5122

Fax: 870-446-2063

Fire Management Officer: Mark Morales

Assistant Fire Management Officer: Vacant

Boston Mountain / Magazine Ranger District*Boston Mountain Office*

1803 North 18th - POB 76

Ozark, Arkansas 72949

Phone: 479-667-2191

Fax: 479-667-5807

Fire Management Officer: Rickey Williamson

Assistant Fire Management Officer: Mike Klick

Magazine Office

3001 East Walnut St. - POB 511

Paris, Arkansas 72855

Phone: 479-963-3076

Fax: 479-963-8055

District Ranger:

Fire Management Officer: Rickey Williamson

Assistant Fire Management Officer: Mike Klick

Pleasant Hill District

2591 Highway 21 North - POB 190

Clarksville, AR 72830

Phone: 479-754-2864

Fax: 479-754-3017

Fire Management Officer: Dan Martin

Assistant Fire Management Officer: Corey Highfill

St. Francis / Sylamore Ranger District

St. Francis Office

2675 Highway 44

Marianna, Arkansas 72360

Phone: 479-754-2864

Fax: 479-295-3382

Fire Management Officer: Trent Girard

Assistant Fire Management Officer: Brian Sullivan

Sylamore Ranger Office

609 Sylamore Ave - POB 1279

Mountain View, AR 72560

Phone: 479-754-2864

Fax: 479-295-3382

Fire Management Officer: Trent Girard

Assistant Fire Management Officer: Brian Sullivan

Ouachita National Forest

POB Box 1270 - Federal Building

Hot Springs, Arkansas 71902

Phone: 501-321-5202

Fax: 501-321-5353

Forest Supervisor: Norm Wagoner

Phone: 501-321-5275

Deputy Forest Supervisor: Joby Timm

Phone: 501-321-5273

Fire Team Leader: Lance Elmore

Phone: 501-321-5284

Fire Management Officer, Ouachita & Ozark National Forests: Andy Dyer

Phone: 501-321-5217

Caddo / Womble Ranger District

1523 Highway 270 East

Mt. Ida, Arkansas 71957

Fire Management Officer: Ben Rowland

Phone: 870-867-2101

Fax: 870-867-3338

Mena / Oden Ranger District*Mena Office*

1063 Highway 71 North

Mena, Arkansas 71953

Phone: 479-394-5595

Fax: 479-394-2389

Fire Management Officer: Adam Strothers

Assistant Fire Management Officer: Darwin Bult

Oden Office

POB 332

Oden, Arkansas 71961

Phone: 479-394-5595

Fax: 479-394-2389

Fire Management Officer: Adam Strothers

Assistant Fire Management Officer: Darwin Bult

Jessieville / Winona / Fourche Ranger District*Jessieville Office*

8607 N. Hwy 7

Jessieville, Arkansas 71949

Phone: 501-984-5313

Fax: 501-984-6253

Fire Management Officer: Becky Finser

Assistant Fire Management Officer: Clayton Swanger

Winona Office

1069 N. Fourche Ave

Perryville, Arkansas 72126

Phone: 501-984-5313

Fax: 501-984-6253

Fire Management Officer: Becky Finser

Assistant Fire Management Officer: Clayton Swanger

Fourche Office

Highway 10 East - POB 459

Danville, Arkansas 72833

Phone: 501-984-5313

Fax: 501-984-6253

Fire Management Officer: Becky Finser

Assistant Fire Management Officer: Clayton Swanger

Oklahoma Ranger District

111 S. State Highway 259 A
Broken Bow, OK 74728
Phone: 580-494-6402
Fax: 918-567-3073
Fire Management Officer: Sam McFarland
Assistant Fire Management Officer: Kris Wilson

Cold Springs/ Poteau Ranger District of the Ouachita National Forest

District Ranger: A.J. Brigance
Cold Springs Office:
2190 E. Main Street - POB 417
Booneville, Arkansas 72927
Phone: 479-637-4174
Fax: 479-637-3447
Fire Management Officer: Tim Nutley
Assistant Fire Management Officer: R.L. Self

Poteau Office

POB 2255
Waldron, Arkansas 72958
Phone: 479-637-4174
Fax: 479-637-3447
Fire Management Officer: Tim Nutley
Assistant Fire Management Officer: R.L. Self

US Fish and Wildlife Service**Big Lake National Wildlife Refuge**

P.O. Box 67
Manila, Arkansas 72442
Phone: 870-564-2429
Contact: Jeremy Bennett

Cache River National Wildlife Refuge

Rt. 2, Box 126-T; Augusta, Arkansas 72006
Phone: 870-347-2614
Project Leader: Keith Weaver
Forester: Eric Johnson

Felsenthal/Pond Creek/Overflow National Wildlife Refuge

P.O. Box 1157
Crossett, Arkansas 71635
Phone: 870-364-3167
Forester: Larry Threet

Wapanocca National Wildlife Refuge

P.O. Box 279

Turrell, Arkansas 72384

Phone: 870-343-2595,

Refuge Manager: Jason Wilson

Holla – Bend National Wildlife Refuge

Rt. 1, Box 59

Dardanelle, Arkansas 72834

Phone: 479-229-4300

Assistant Refuge Manager: Karla Mitchell

Forester: Roger Standridge

White River National Wildlife Refuge

P.O. Box 308

DeWitt, Arkansas 72042

Phone: 870-946-1468

Refuge Manager: Dennis Sharp

Forester: Jeff Denman

US National Park Service**Buffalo National River**

402 North Walnut - Suite 134

Harrison, Arkansas 72601

Phone: 870-365-2700

Fax: 870-365-2797

Fire Management Officer: Fenn Wimberly

Phone: 870-365-2766

Chief Ranger: Bob Maquire

Phone: 870-365-2740

Hot Springs National Park

101 Reserve Street

Hot Springs, Arkansas 72901

Phone: 501-624-3383

Fax: 501-623-7310

Fire Coordinator: Shelley Todd

Fort Smith National Historic Site

POB 1406

Fort Smith, Arkansas 72902

Phone: 479-783-3961

Superintendent: Bill Black

Post National Monument

1741 Old Post Road

Phone: 870-548-2207

Gillett, Arkansas 72055

Fire Coordinator: Leo Acosta

Appendix 8: Examples of Fire Weather Forecast Products



Routine Fire Weather Forecast

.DISCUSSION...

WEAK SYSTEM WILL MOVE INTO THE STATE TONIGHT INTO SATURDAY. SMALL RAIN CHANCES WILL BE POSSIBLE ACROSS THE EAST SATURDAY AFTERNOON. MOISTURE WILL RETURN SATURDAY...WITH MINIMUM RELATIVE HUMIDITIES IN THE 40TH PERCENTILE. DRIER AIR WILL RETURN FOR SUNDAY...WITH MINIMUM RELATIVE HUMIDITIES IN THE 30TH PERCENTILE.

RAIN CHANCES WILL BE IN THE FORECAST MONDAY...AND AGAIN ON THURSDAY...AS SEVERAL SYSTEMS MOVE THROUGH.

GARLAND-PERRY-PULASKI-SALINE-
301 PM CST FRI FEB 1 2013

	TONIGHT	SAT	SAT NIGHT	SUN
CLOUD COVER	PCLDY	PCLDY	MCLEAR	MCLEAR
CHANCE PRECIP (%)	0	0	0	0
PRECIP TYPE	NONE	NONE	NONE	NONE
TEMP (24H TREND)	29 (+5)	56 (+10)	33	60
MX/MN RH% (24H TREND)	79 (+25)	44 (+14)	75	33
20FTWND-AM(MPH)		W 7		NW 4
20FTWND-PM(MPH)	S 5	W 9	NW 6	N 5
PRECIP AMOUNT	0.00	0.00	0.00	0.00
PRECIP DURATION	0	0	0	0
MIXING HGT(FT-MSL)		3684		4193
CATEGORY DAY		4		3
TRANSPORT WND (M/S)		W 8		NW 5
TRANSPORT WND (MPH)		W 18		NW 11
VENT RATE (M/S-M)		8984		6390
DISPERSION INDEX		41		28
LVORI	1		1	
HAINES INDEX	3	4	5	4
STABILITY CLASS	F	C	F	B
MIX HGT 500 (F)		52		51

REMARKS...NONE.

.FORECAST FOR DAYS 3 THROUGH 7...

.MONDAY...MOSTLY CLOUDY. CHANCE OF SHOWERS. LOWS IN THE UPPER 30S. HIGHS IN THE UPPER 50S. SOUTH WINDS 5 MPH.

.TUESDAY...PARTLY CLOUDY. LOWS IN THE UPPER 30S. HIGHS IN THE UPPER 50S. WEST WINDS 5 MPH.

.WEDNESDAY...MOSTLY CLEAR. LOWS IN THE UPPER 30S. HIGHS IN THE UPPER 50S. EAST WINDS 5 MPH.

.THURSDAY...MOSTLY CLOUDY. SLIGHT CHANCE OF SHOWERS. LOWS IN THE UPPER 30S. HIGHS IN THE UPPER 50S. WEST WINDS 5 MPH.

.FRIDAY...MOSTLY CLOUDY. SLIGHT CHANCE OF SHOWERS. LOWS IN THE LOWER 40S. HIGHS IN THE UPPER 50S. EAST WINDS 5 TO 10 MPH.

WWUS84 KLZK 032042
RFWLZK
FIRE WEATHER WATCH
NATIONAL WEATHER SERVICE LITTLE ROCK AR
242 PM CST SAT MAR 3 2007

...FIRE WEATHER WATCH UNTIL 6 PM SATURDAY FOR MUCH OF ARKANSAS...
.STRONG HIGH PRESSURE WILL CONTINUE TO CHANNEL DRY AIR AND GUSTY
WEST TO NORTHWEST WINDS INTO ARKANSAS OVER THE WEEKEND. GUSTY
WINDS FROM THE WEST TO NORTHWEST OF 10 TO 25 MPH SATURDAY...ALONG
WITH LOW HUMIDITY LEVELS WILL INCREASE THE FIRE DANGER ACROSS THE
STATE. CONDITIONS FOR SUNDAY WILL HAVE TO BE MONITORED FOR A
POSSIBLE WATCH.

ARZ003>007-012>016-021>025-030>034-037>047-052>057-062>069-040000-
/O.CON.KLZK.FW.A.0003.000000T0000Z-070304T0000Z/
ARKANSAS-BAXTER-BOONE-BRADLEY-CALHOUN-CLARK-CLEBURNE-CLEVELANDCONWAY-
DALLAS-DESHA-DREW-FAULKNER-FULTON-GARLAND-GRANT-HOT SPRINGINDEPENDENCE-
IZARD-JACKSON-JEFFERSON-JOHNSON-LINCOLN-LOGAN-LONOKEMARION-
MONROE-MONTGOMERY-NEWTON-OUACHITA-PERRY-PIKE-POLK-POPEPRAIRIE-
PULASKI-SALINE-SCOTT-SEARCY-SHARP-STONE-VAN BUREN-WHITEWOODRUFF-
YELL-
242 PM CST SAT MAR 3 2007

...FIRE WEATHER WATCH IS IN EFFECT UNTIL 6 PM CST THIS
AFTERNOON...
A FIRE WEATHER WATCH IS IN EFFECT UNTIL 6 PM CST THIS
AFTERNOON.

GUSTY WEST TO NORTHWEST WINDS OF 15 TO 25 MPH WILL LAST INTO THE
AFTERNOON AND EARLY EVENING ACROSS MUCH OF ARKANSAS. COMBINED WITH
LOW RELATIVE HUMIDITY VALUES AROUND 30 PERCENT...WILL INCREASE THE
FIRE DANGER...WITH A FIRE WEATHER WATCH ISSUED UNTIL 6 PM.

A FIRE WEATHER WATCH MEANS THAT CRITICAL FIRE WEATHER CONDITIONS
ARE POSSIBLE. LISTEN FOR LATER FORECASTS AND POSSIBLE RED FLAG
WARNINGS.

PLEASE ADVISE APPROPRIATE OFFICIALS OR FIRE CREWS OF THIS FIRE
WEATHER WATCH.

RED FLAG WARNING
NATIONAL WEATHER SERVICE LITTLE ROCK AR

143 PM CST FRI MAR 2 2007
ARZ025-034-046-047-057-065-030000-
/O.EXA.KLZK.FW.W.0002.000000T0000Z-070303T0000Z/
ARKANSAS-DESHA-JACKSON-MONROE-PRAIRIE-WOODRUFF-
143 PM CST FRI MAR 2 2007

...RED FLAG WARNING IN EFFECT UNTIL 6 PM CST THIS AFTERNOON...

THE NATIONAL WEATHER SERVICE IN LITTLE ROCK HAS ISSUED A RED FLAG WARNING FOR FAR EASTERN PARTS OF ARKANSAS...WHICH IS IN EFFECT UNTIL 6 PM CST THIS AFTERNOON. WEST TO NORTHWEST WINDS OF 15 TO 25 MPH ARE EXPECTED THIS AFTERNOON TO EARLY EVENING. RELATIVE HUMIDITY VALUES FROM 20 TO 25 PERCENT ARE ALSO EXPECTED.

PLEASE ADVISE THE APPROPRIATE OFFICIALS OR FIRE CREWS OF THIS RED FLAG WARNING.

A RED FLAG WARNING MEANS THAT CRITICAL FIRE WEATHER CONDITIONS ARE EITHER OCCURRING NOW...OR WILL SHORTLY. A COMBINATION OF STRONG WINDS...LOW RELATIVE HUMIDITY...AND WARM TEMPERATURES WILL CREATE EXPLOSIVE FIRE GROWTH POTENTIAL.
\$\$

ARZ003>007-012>016-021>024-030>033-037>045-052>056-062>064-
066>069-030000-
/O.CON.KLZK.FW.W.0002.000000T0000Z-070303T0000Z/
BAXTER-BOONE-BRADLEY-CALHOUN-CLARK-CLEBURNE-CLEVELAND-CONWAYDALLAS-
DREW-FAULKNER-FULTON-GARLAND-GRANT-HOT SPRING-INDEPENDENCEIZARD-
JEFFERSON-JOHNSON-LINCOLN-LOGAN-LONOKE-MARION-MONTGOMERYNEWTON-
OUACHITA-PERRY-PIKE-POLK-POPE-PULASKI-SALINE-SCOTT-SEARCYSHARP-
STONE-VAN BUREN-WHITE-YELL-
143 PM CST FRI MAR 2 2007

...RED FLAG WARNING REMAINS IN EFFECT UNTIL 6 PM CST THIS AFTERNOON...

A RED FLAG WARNING REMAINS IN EFFECT UNTIL 6 PM CST THIS AFTERNOON...FOR MUCH OF ARKANSAS.

WEST TO NORTHWEST WINDS OF 15 TO 25 MPH ARE EXPECTED THIS AFTERNOON TO EARLY EVENING. RELATIVE HUMIDITY VALUES FROM 20 TO 25 PERCENT ARE ALSO EXPECTED.

A RED FLAG WARNING MEANS THAT CRITICAL FIRE WEATHER CONDITIONS ARE EITHER OCCURRING NOW...OR WILL SHORTLY. A COMBINATION OF STRONG WINDS...LOW RELATIVE HUMIDITY...AND WARM TEMPERATURES WILL CREATE EXPLOSIVE FIRE GROWTH POTENTIAL.

FIRE WEATHER PLANNING FORECAST FOR SOUTHWEST ARKANSAS...
 NORTHWEST LOUISIANA...EAST TEXAS...AND EXTREME SOUTHEAST OKLAHOMA
 NATIONAL WEATHER SERVICE SHREVEPORT LA
 159 PM CDT SAT MAR 30 2013

.DISCUSSION...

UNSETTLED WEATHER TO CONTINUE THROUGH THE FIRST OF APRIL. BY THE END
 OF THE FIRST WEEK OF APRIL...EXPECT THE UNSETTLED WEATHER TO GIVE WAY
 TO FAIR WEATHER.

ARZ050-051-059-311015-
 SEVIER-HOWARD-LITTLE RIVER-
 159 PM CDT SAT MAR 30 2013

...ARKANSAS DISTRICT 2...

	TONIGHT	SUN	SUN NIGHT	MON
CLOUD COVER	PCLDY	MCLDY	PCLDY	PCLDY
PRECIP TYPE	TSTMS	TSTMS	SHOWERS	SHOWERS
CHANCE PRECIP (%)	40	60	20	30
TEMP (24H TREND)	56 (-2)	70 (-1)	48	73
<u>RH</u> % (24H TREND)	90 (-6)	59 (-10)	80	46
20FTWND-AM(MPH)		<u>LG</u> T/VAR		E 3
20FTWND-PM(MPH)	SW 3	N 5	NE 3	E 4
PRECIP AMOUNT	0.16	0.19	0.04	0.02
PRECIP DURATION	2	3	2	2
MIXING HGT(M- <u>MSL</u>)	75	1209	75	1009
MIXING HGT(<u>FT</u> - <u>MSL</u>)	246	3968	246	3309
TRANSPORT <u>W</u> ND (M/S)	SW 9	W 3	W 4	S 1
TRANSPORT <u>W</u> ND (MPH)	SW 20	W 7	W 9	S 2
VENT RATE (M^2/S)	675	3627	300	1009
CATEGORY DAY	1	2	1	1
MIX HGT 500 TEMP(F)		67		67
<u>STABILITY</u> CLASS	F	<u>B</u>	F	<u>B</u>

REMARKS...NONE.

.FORECAST FOR DAYS 3 THROUGH 7...

.TUESDAY...MOSTLY CLOUDY WITH CHANCE OF RAIN SHOWERS AND ISOLATED
 THUNDERSTORMS. LOWS IN THE UPPER 40S. HIGHS IN THE LOWER 50S.
 NORTHEAST WINDS AROUND 10 MPH.
 .WEDNESDAY...MOSTLY CLOUDY WITH CHANCE OF RAIN. LOWS IN THE UPPER
 30S. HIGHS IN THE MID 50S. NORTHEAST WINDS 5 TO 10 MPH.
 .THURSDAY...MOSTLY CLOUDY. SLIGHT CHANCE OF RAIN. LOWS IN THE
 UPPER 30S. HIGHS IN THE LOWER 60S. SOUTH WINDS UP TO 5 MPH.
 .FRIDAY...MOSTLY CLEAR. LOWS IN THE UPPER 30S. HIGHS IN THE UPPER
 60S. SOUTH WINDS UP TO 10 MPH.
 .SATURDAY...MOSTLY CLEAR. LOWS IN THE UPPER 40S. HIGHS IN THE
 LOWER 70S. SOUTHEAST WINDS UP TO 15 MPH.

\$\$

ARZ060-061-070>073-311015-
 HEMPSTEAD-NEVADA-MILLER-LAFAYETTE-COLUMBIA-UNION AR-
 159 PM CDT SAT MAR 30 2013

...ARKANSAS DISTRICT 4...

	TONIGHT	SUN	SUN NIGHT	MON
CLOUD COVER	MCLDY	MCLDY	MCLDY	PCLDY
PRECIP TYPE	TSTMS	TSTMS	TSTMS	SHOWERS
CHANCE PRECIP (%)	30	70	40	30
TEMP (24H TREND)	56 (-1)	70 (0)	50	73
<u>RH</u> % (24H TREND)	96 (0)	59 (-8)	81	46
20FTWND-AM(MPH)		SW 4		NE 5
20FTWND-PM(MPH)	SW 5	W 6	NE 4	NE 5
PRECIP AMOUNT	0.09	0.26	0.12	0.06
PRECIP DURATION	2	4	2	2
MIXING HGT(M- <u>MSL</u>)	17	1206	17	1295
MIXING HGT(<u>FT-MSL</u>)	56	3957	56	4248
TRANSPORT <u>WND</u> (M/S)	SW 9	W 4	W 4	S 1
TRANSPORT <u>WND</u> (MPH)	SW 21	W 9	W 8	S 2
VENT RATE (M^2/S)	153	4824	68	1295
CATEGORY DAY	1	3	1	1
MIX HGT 500 TEMP(F)		69		68
<u>STABILITY</u> CLASS	E	<u>B</u>	E	<u>C</u>

REMARKS...NONE.

.FORECAST FOR DAYS 3 THROUGH 7...

.TUESDAY...MOSTLY CLOUDY. CHANCE OF RAIN SHOWERS AND ISOLATED
 THUNDERSTORMS. LOWS IN THE UPPER 40S. HIGHS IN THE MID 50S.
 NORTHEAST WINDS 10 TO 15 MPH.

.WEDNESDAY...MOSTLY CLOUDY WITH CHANCE OF RAIN. LOWS IN THE UPPER
 30S. HIGHS IN THE UPPER 50S. NORTHEAST WINDS 5 TO 10 MPH.

.THURSDAY...MOSTLY CLOUDY WITH SLIGHT CHANCE OF RAIN. LOWS AROUND
 40. HIGHS IN THE LOWER 60S. NORTH WINDS AROUND 5 MPH.

.FRIDAY...MOSTLY CLEAR. LOWS IN THE LOWER 40S. HIGHS IN THE UPPER
 60S. SOUTHEAST WINDS 5 TO 10 MPH.

.SATURDAY...MOSTLY CLEAR. LOWS IN THE UPPER 40S. HIGHS IN THE MID
 70S. SOUTH WINDS UP TO 15 MPH.

\$\$